


CITTI 6032 WITH INSERT

60" x 32" x 20"

Citti® is derived from sanskrit for "free spirit." At the same time, the name evokes today's great cities: these are the perfect baths for urban living.

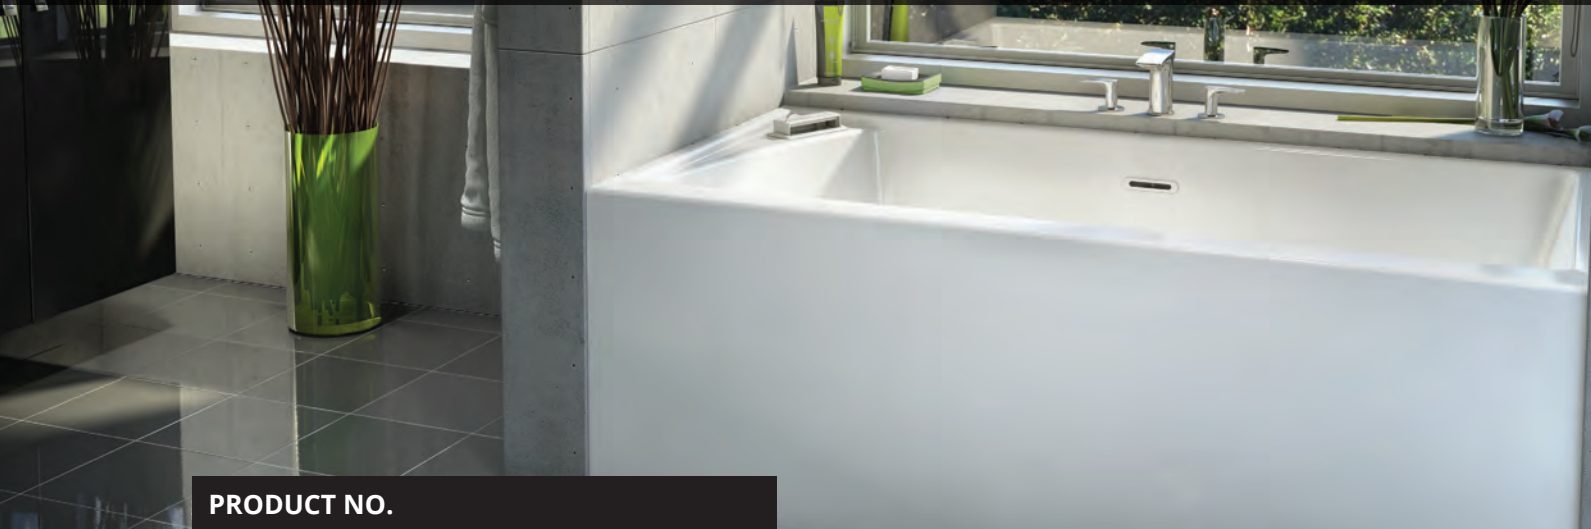

PRODUCT NO.

MODEL	TMU	TUB
Left	BCIDRAJLT-XX	BCIDRAJLN-XX
Right	BCIDRAJRT-XX	BCIDRAJRN-XX

THERMOMASSEUR (TMU) Hydro-thermo massage • Air jet system	\$4,935
Jets	42
1 heated backrest	Included
Mia® Control	Included
BU-Touch Control Application BUTOUCH	\$430
Geysair®	Included
AromaCloud® BAROMAC	\$490
AromaFlow** BAROMAF NEW	\$950
Illuzio Chromatherapy BCHRO6	\$925

TUB Soaker	\$2,590
AromaCloud® BAROMAC	\$490
AromaFlow** BAROMAF NEW	\$950
Illuzio Chromatherapy BCHRO6	\$925
WarmTouchShell® BWTS	\$1,125
DOT control	Included with therapy

FEATURES

Installation type	Alcove (3 walls)		
Integrated skirt & tile flange (specify right or left)	Installed & Included		
No. of bathers		Imp. gallons	42
US gallons	50		

INTEGRATED WASTE & OVERFLOW BOVERINI-XX

White 01, Biscuit 02, Chrome 07, Brushed Nickel 09, Polished Nickel 10, Matte White with UltraVelour finish 32	Installed & Included
--	----------------------

STANDARD COLOR

White 01 Biscuit 02	Included
----------------------	----------

OPTIONS (UPCHARGE APPLICABLE)

FINISH	
UltraVelour Matte Finish (white only) BVEL1	\$650
CONTROL (TMU only)	
MiaPlus** BMIAP2-XX	\$285
UNIVERSAL ARMRESTS BGBGU-XX	
White 01	\$750
INTEGRATED WASTE & OVERFLOW BOVERINI-XX	
Matte Black 19, Satin Brass 18	\$120
IF REQUIRED BY CONSTRUCTION CODE	
Brass waste & overflow kit BDRCOB	\$240
Brass waste kit BDRCB	\$60

- Turbine must be remotely installed. With the Control installed on the deck, a complete shower door cannot be installed. Faucets must be wall-mounted. Don't forget to specify the **finish of the integrated waste & overflow**.
- * The MiaPlus® Control is included when purchasing Chromatherapy on a TMU.
- ** When ordering an AromaFlow, an Integrated waste & overflow is mandatory (Included). Specify the finish of the waste.




CITTI 6032 WITH INSERT



The insert can be positioned on either the right or left side of the bath to hold the AromaCloud® or soap and shampoo.

INSTALLATION

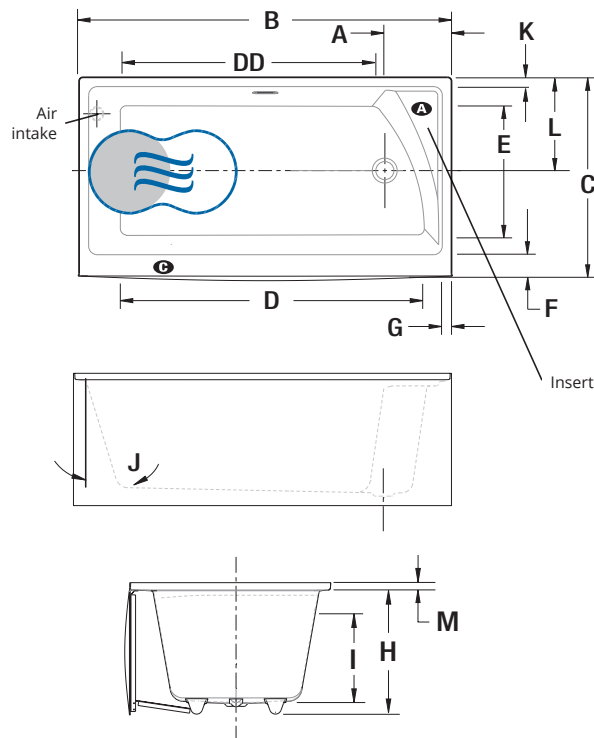

LETTER	DESCRIPTION	MEASURE
A	Outside edge to center drain	10 7/8"
B	Total length	60"
C	Total width	32"
D	Bathing well length	49 1/4"
DD	Bathing well length - insert side	42 5/8"
E	Bathing well width	21 1/8"
F	Deck width (skirt side)	3 3/4"
G	Deck width at drain end	2 1/8"
H	Height from bottom of bath to top deck	20"
I	Maximum water level Maximum water level with AromaFlow	14 1/2" 13 13/16"
J	Slope of backrest	17°
K	Deck width overflow side	2 1/8"
L	Outside edge to center drain	15 1/8"
M	Tile flange height	1"

- A** AromaCloud® position
- G** Control position when factory-installed (Mia® or DOT)
- Indicates heated backrest (TMU)
- ☞ Indicates WarmTouchShell® position (TUB)

TECHNICAL SPECIFICATIONS

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.
Turbine	Access to the pump must be at least 18" x 22". Standard connection is 20 A, 120 V, 60 Hz , dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 Hz , dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.
Others	<ul style="list-style-type: none"> - The Geysair® is located on the same side as the heated backrest. It must NOT be relocated. It must be connected to the hot water supply and be accessible (provide access). - The turbine must be remotely installed. - Citti bathtubs include an integrated tile flange, specify right or left. - Insert can be installed on right or left side. - The water level will be lower when an AromaFlow is installed.

Approx. shipping weight	125 lb
Turbine power	550 W
Air heater	600 W
WARRANTY	
Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

* Some restrictions apply | www.bainultra.com/warranty

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/dealers/dealer-documentation-and-catalog).

The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.