




PRODUCT SHEET
ELEGANCIA 6032
 60" X 32" X 19"

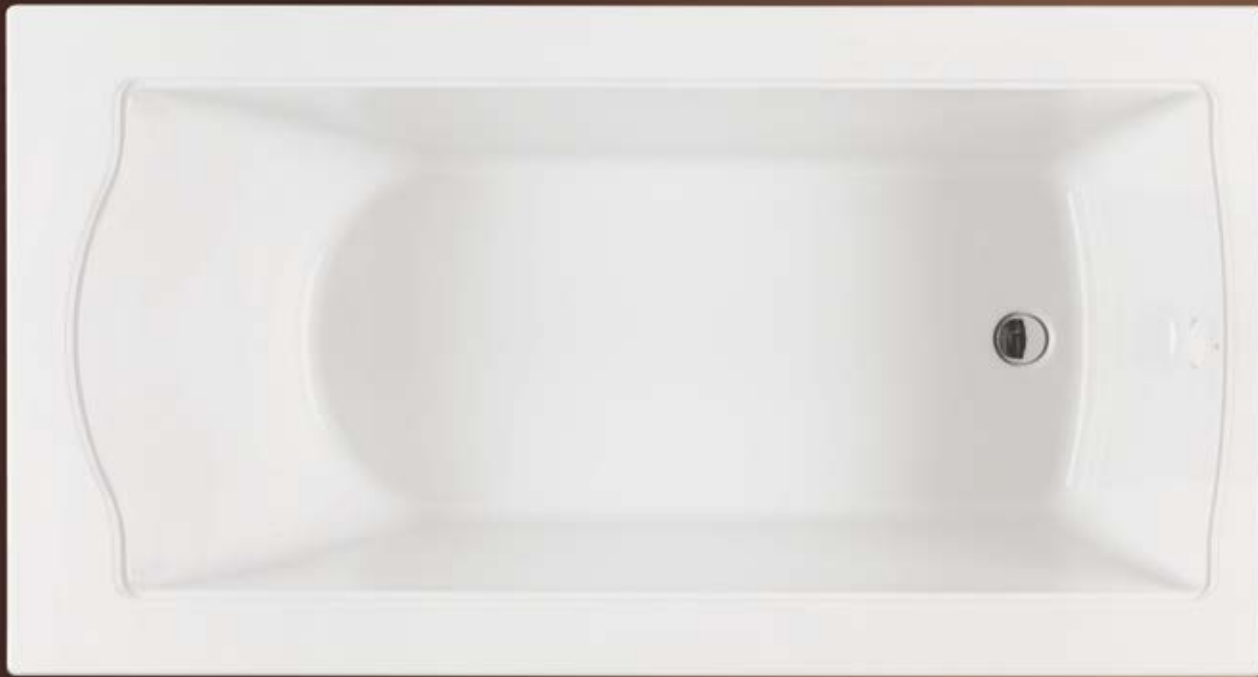

THERMOMASSEUR® BATH	\$
THERMASENS® BATH	\$
TUB	\$

THERMOMASSEUR (TMU)	
Jets	41
1 heated backrest	included
MiaPlus® Control	included
Geysair®	included
AromaCloud®	\$
Chromatherapy - 2 LED	\$

THERMASENS (TMSU)		TUB
AromaCloud®	included	\$
Chromatherapy - 2 LED	included	\$
WarmTouchShell®	included	\$
DOT control	included	included with therapy

FEATURES			
Installation	Drop-in or Alcove (3 walls)		
No. of bathers	↓	Imp. gallons	37
US gallons	45	Integrated tile flange	included

OPTIONAL UPCHARGE APPLICABLE			
COLOR			
Standard			
White	Biscuit		
Optional			
			\$
Black	Sandbar	Gray	
CONTROL (TMU ONLY)			
MiaMultij®	\$		
SKIRT			
	MULTIFIT	SJ-1	
Skirt	\$	\$	
Optional color	\$	\$	
WASTE & OVERFLOW			
	D14	D13	
Chrome	\$	\$	
White, Biscuit	\$	N/A	
Brass	\$	\$	
Brushed nickel & Polished nickel	\$	\$	
Unplated & Oil-rubbed bronze		N/A	\$

DON'T FORGET THAT AN INTEGRATED TILE FLANGE IS AVAILABLE AT NO EXTRA COST. YOU MUST SPECIFY WASTE POSITION.

1 800 463.2187 From 8 a.m. to 8 p.m. Monday to Thursday (EST)
 info@bainultra.com From 8 a.m. to 5 p.m. on Friday (EST)

ELEGANCIA 6032 60" X 32" X 19"

ACCESSORIES (OPTIONAL)

INTEGRATED TILE FLANGE

Included (specify right or left).



OTHERS

- There is a height difference for the integrated tile flange (see drawing Detail A).
- Available with or without integrated tile flange (specify right or left).

TOTAL PRICE

\$

DROP-IN/ALCOVE INSTALLATION

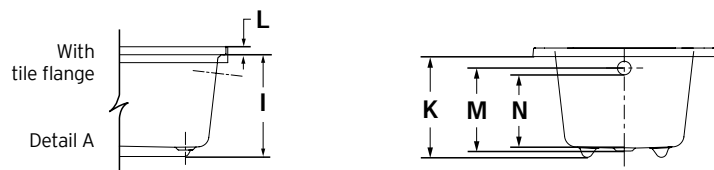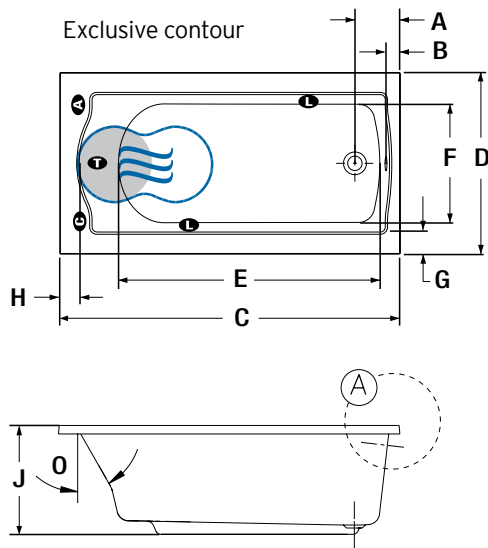

LETTER	DESCRIPTION	MEASURE
A	Outside edge to center waste	8"
B	Outside edge to overflow	2 1/4"
C	Total length	60"
D	Total width	32"
E	Bathing well length	46 3/8"
F	Bathing well width	21"
G	Deck width	3 7/8"
H	Deck width at backrest end (widest point)	3 3/8"
I	Height from bottom of tub to top deck	19 1/4"
J	Height from bottom of tub to top deck	19 1/4"
K	Height from bottom of tub to bottom of lip	17 3/4"
L	Tile flange height	1"
M	Height from waste to center of overflow	14 1/2"
N	Maximum water level	12 7/8"
O	Slope of backrest	30°

- T** Indicates turbine position (TMU)
- L** Indicates LED light position
- Indicates heated backrest (TMU)
- Ⓢ** Indicates control position when factory-installed
- ☁** Indicates WarmTouchShell position (TMSU)
- A** Indicates AromaCloud position

TECHNICAL SPECIFICATIONS

Hot water supply required	Should be 70% of water capacity of tub or greater.
Turbine	Access to the pump must be at least 18" X 22". Standard connection is 20 A, 120 V, 60 hz , dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 hz , dedicated line with a GFCI. Air vent necessary: 2" X 4" minimum

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/documentation/documentation).

Approx. shipping weight	125 lbs
Turbine power	755 W
Air heater	700 W

WARRANTY

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

*Some restrictions apply | www.bainultra.com/warranty



The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0,64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.