

FREESTANDING

THERMOMASSEUR® BATH	\$
TUB no therapy	\$

THERMOMASSEUR (TMU)	
Jets	35
1 heated backrest	included
1 heated headrest	included
MiaMulti® Control *	included
Geysair [®]	included
AromaCloud®	N/A
Chromatherapy - 2 LED	\$

TUB no therapy	
AromaCloud®	N/A
Chromatherapy - 2 LED	\$
WarmTouchShell®	\$
DOT control	included with therapy

FEATURES			
Installation		Fr	eestanding
No. of bathers	*	Raised headrest	1
US gallons	49	Integrated waste & overflow	inst. & incl.
Imp. gallons	41		
WASTE & OVERFLOW			
Chrome, White			
Brass, Brushed Nickel, Polished	Nickel		

FEATURES INCLUDED	
COLOR	
Standard White	

OPTIONAL UPCHARGE APPLICABLE		
FINISH		
UltraVelour Matte Finish (White Only)	\$	
ISLAND TUB DRAIN™**		
Island Tub Drain™	\$	



DON'T FORGET THAT THIS MODEL IS AVAILABLE IN WHITE ONLY.

DON'T FORGET TO SPECIFY THE FINISH OF THE INTEGRATED WASTE & OVERFLOW.

*CONTROL AND FAUCET CANNOT BE INSTALLED ON THE DECK OF THE BATH.

** AN ISLAND TUB DRAIN IS REQUIRED WHEN THERE IS NO ACCESS UNDER THE BATH.
FOR EVANESCENCE 5936, THE ISLAND TUB DRAIN IS COMPATIBLE ONLY WITH BRASS
WASTE & OVERFLOW KIT (BDRCOB) AND BRASS WASTE KIT (BDRCB).



EVANESCENCE 5936 59" X 36" X 28"

ACCESSORIES (OPTIONAL)

CUTTING TEMPLATE # 90000069


OTHERS


- Faucet must be freestanding or wall-mounted.
- The turbine must be remotely installed.
- Controls cannot be installed on the bath.


TOTAL PRICE

\$

FREESTANDING INSTALLATION

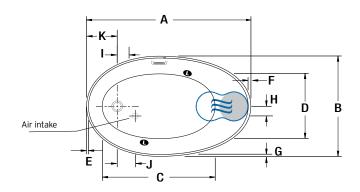





LETTER	DESCRIPTION	MEASURE
A	Total length	59"
В	Total width	36"
С	Bathing well length	41 1/2''
D	Bathing well width	23 7/8"
E	Deck width at waste end	1"
F	Deck width at headrest	1 1/8"
G	Deck width	1 1/8"
Н	Center tub waste to air intake	3 1/2"
I	Center tub waste to waste hole	4 1/4"
J	Center tub waste to air intake	6 1/2"
K	Tub outside edge to center tub waste	11"
L	Total height	24 1/2"
M	Minimum height of bath	23 1/2"
N	Total height to headrest	28 1/2"
0	Slope at waste end	12°
P	Slope of backrest	31°
Q	Base length	47 3/8"
R	Base width	26 7/8"
S	Height from waste to center of overflow	16"

Indicates LED light position (≋)Indicates WarmTouchShell position (TMSU) Indicates heated backrest (TMU)

	S
- F	R —

Hot water supply required	Should be 70% of water capacity of tub or greater.
Turbine	Access to the pump must be at least 18" X 22". Standard connection is 20 A. 120 V, 60 hz , dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option , a second line is needed 15 A. 120 V, 60 hz , dedicated line with a GFCI. Air vent necessary 2" X 4" minimum

The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.

provincial/state and local building codes and regulations (www.bainultra.com/documentation/documentation).

Approx. shipping weight	220 lbs
Turbine power	600 W
Air heater	600 W

WARRANTY	
Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

*Some restrictions apply | www.bainultra.com/warranty



