



PRODUCT SHEET  
**ELLIPSE 6636**  
 66" X 36" X 21"



<b>THERMOMASSEUR® BATH</b>	\$
<b>THERMASENS® BATH</b>	\$
<b>TUB no therapy</b>	\$

THERMOMASSEUR (TMU)	
Jets	38
1 heated backrest	included
MiaPlus® Control	included
Geysair®	included
AromaCloud®	\$
Chromatherapy - 2 LED	\$
2 <sup>nd</sup> heated backrest (advanced technology)	\$

THERMASENS (TMSU)		TUB no therapy
AromaCloud®	included	\$
Chromatherapy - 2 LED	included	\$
WarmTouchShell®	included	\$
2 <sup>nd</sup> WarmTouchShell®	\$	\$
DOT control	included	included with therapy

FEATURES			
Installation	Drop-in or Undermount *		
No. of bathers		Imp. gallons	40
US gallons	48		

**OPTIONAL UPCHARGE APPLICABLE**

COLOR	
<b>Standard</b>	
White	Biscuit
<b>Optional</b>	
Black	Sandbar
Gray	\$
CONTROL (TMU ONLY)	
MiaMulti®	\$
WASTE & OVERFLOW	
	<b>16" X 35"</b>
Chrome	\$
White, Biscuit	\$
Brass	\$
Brushed nickel, Polished nickel & Oil-rubbed bronze	\$

DON'T FORGET TO INDICATE FLAT OR ROLLED DECK.  
 \* THE AROMACLOUD IS NOT AVAILABLE WITH UNDERMOUNT INSTALLATION.

1 800 463.2187 info@bainultra.com From 8 a.m. to 8 p.m. Monday to Thursday (EST)  
 From 8 a.m. to 5 p.m. on Friday (EST)

# ELLIPSE 6636 66" X 36" X 21"

## ACCESSORIES (OPTIONAL)

CUTTING TEMPLATE

# 90000055





OTHERS

- There is a height difference for the rolled deck (see drawing Detail A).

TOTAL PRICE

\$

## DROP-IN/UNDERMOUNT INSTALLATION

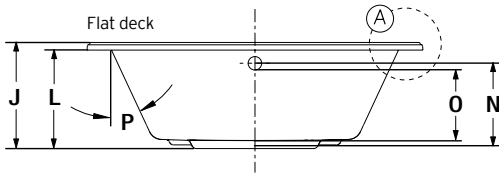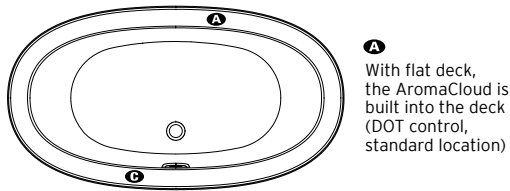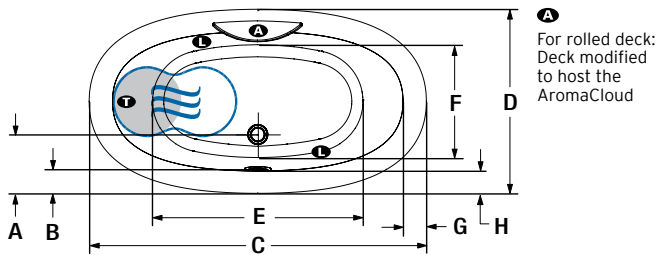

LETTER	DESCRIPTION	MEASURE
A	Outside edge to center waste	11 1/2"
B	Outside edge to overflow	4 5/8"
C	Total length	66"
D	Total width	36"
E	Bathing well length	42 3/8"
F	Bathing well width	22 1/4"
G	Deck width at backrest end	4 3/8"
H	Flat surface width	4 1/4"
I	Rolled deck width	4 3/4"
J	Height from bottom of tub to top deck	21"
K	Height from bottom of tub to top deck	22"
L	Height from bottom of tub to bottom of lip	19 1/2"
M	Height from bottom of lip to top deck	2 1/2"
N	Height from waste to center of overflow	16 5/8"
O	Maximum water level	14 7/8"
P	Slope of backrest	25°

- Indicates turbine position (TMU)
- Indicates LED light position
- Indicates heated backrest (TMU)
- Indicates control position when factory-installed
- Indicates WarmTouchShell position (TMSU)
- Indicates AromaCloud position

Available with flat or rolled deck.

## TECHNICAL SPECIFICATIONS

<b>Hot water supply required</b>	Should be 70% of water capacity of tub or greater.
<b>Turbine</b>	Access to the pump must be at least 18" X 22". <b>Standard connection is 20 A, 120 V, 60 hz,</b> dedicated line with a Ground-Fault Circuit Interrupter (GFCI). <b>For any additional option, a second line is needed 15 A, 120 V, 60 hz,</b> dedicated line with a GFCI. Air vent necessary: 2" X 4" minimum

<b>Approx. shipping weight</b>	100 lbs
<b>Turbine power</b>	600 W
<b>Air heater</b>	700 W

## WARRANTY

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

\*Some restrictions apply | [www.bainultra.com/warranty](http://www.bainultra.com/warranty)

The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0,64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.

