PRODUCT SHEET MONARCH 6037R 60" x 37" x 20"

[Å	
	THERMOMASSEUR® BATH	\$	
	TUB	\$	

THERMOMASSEUR (TMU)			
Jets	40		
1 heated backrest	included		
MiaPlus® Control (uninstalled)	included		
Geysair®	included		
AromaCloud®	N/A		
Chromatherapy – 2 LED	\$		

TUB no therapy	
Chromatherapy - 2 LED	\$
WarmTouchShell®	\$
DOT control	included with therapy

FEATURES					
Installation	Drop-in or Alcove (3 walls)				
No. of bathers	•	Imp. gallons	40		
US gallons	48	Integrated waste & overflow	inst. & incl.		
INTEGRATED WASTE & OVERFLOW					
Chrome, White					
Brass, Brushed Nickel, Polished Nickel					

COLOR (INNER SHELL) DECK COLOR				
Standard White	Standa Grey Expo	rd Noka	Jet Black	Lagos Blue
OPTIONAL UPCHARGE A	PPLICA	BLE	_	
FINISH (INNER SHELL)				
UltraVelour Matte Finish (White	Only)			\$
DECK COLOR				
Optional Quasar Piatra Emperado	Tuscan Dawn	Statuario Maximus		\$
CONTROL (TMU ONLY)				
MiaMulti® (uninstalled)				\$
WASTE & OVERFLOW				
Chrome				\$
White				\$
Brass				\$
Brushed nickel, Polished nickel & Oil-rubbed bronze				\$
TILE FLANGE (specify left or right)				
Ordered with bath, uninstalled				\$
Factory installed				\$

DON'T FORGET THAT THIS MODEL IS AVAILABLE IN WHITE ONLY WITH CHOICE OF DECK COLOR. DON'T FORGET TO SPECIFY THE FINISH OF THE INTEGRATED WASTE & OVERFLOW.



1 800 463.2187 **9** info@bainultra.com

MONARCH 6037R 60" X 37" X 20"

ACCESSORIES (OPTIONAL)


OTHER

Control cannot be installed on the quartz deck.

TOTAL PRICE

\$


DROP-IN/ALCOVE INSTALLATION

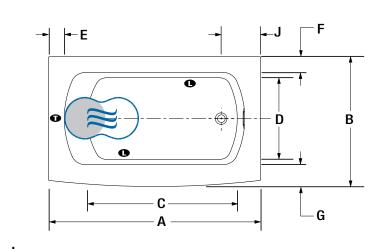

LETTER	DESCRIPTION	MEASURI
A	Total length	60"
в	Total width	36 3/4"
с	Bathing well length (at height of jets)	42 3/8"
D	Bathing well width (at height of jets)	22 3/4"
E	Deck width (backrest)	4 5/8"
F	Deck width (straight side)	4 5/8"
G	Deck width (curved side)	6 ^{3/8} "
н	Tub height	19 ^{7/8} "
I	Height from waste to center of overflow	15 3/8"
J	Outside edge to center waste	11 ^{1/8} "
к	Slope of backrest	24º
L	Quartz deck height	3/4''

Indicates turbine position (TMU)
Indicates WarmTouchShell position (TUB)

Indicates LED light position
 Indicates heated backrest (TMU)



TECHNICAL SPECIFICATIONS

μĶ

Hot water supply required	Should be 70% of water capacity of tub or greater.
Turbine	Access to the pump must be at least 18" X 22". Standard connection is 20 A. 120 V, 60 hz , dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option , a second line is needed 15 A. 120 V, 60 hz , dedicated line with a GFCI.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/documentation/documentation).

Approx. shipping weight	245 lbs
Turbine power	600 W
Air heater	600 W

WARRANTY

Controls-LED-Geysair*	5 years
Quartz Deck*	15 years
Bath & turbine*	20 years

*Some restrictions apply | www.bainultra.com/warranty

The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" 10.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.



