

THERMOMASSEUR® BATH	\$
TUB	\$

THERMOMASSEUR (TMU)		
Jets	44	
1 heated backrest	included	
MiaPlus® Control (uninstalled)	included	
Geysair®	included	
AromaCloud®	N/A	
Chromatherapy - 3 LED	\$	
2 nd heated backrest	\$	

TUB no therapy	
Chromatherapy - 3 LED	\$
WarmTouchShell®	\$
DOT control	included with therapy
2 nd WarmTouchShell®	\$

FEATURES			
Installation	Drop-in or Alcove (3 walls)		
No. of bathers	ŤŤ	Imp. gallons	53
US gallons	63	Integrated waste & overflow	inst. & incl.
INTEGRATED WASTE & OVERFLOW			
Chrome, White			
Brass, Brushed Nickel, Polished Nickel			

FEATURES (INCLUDED)	
COLOR (INNER SHELL)	DECK COLOR
Standard White	Grey Noka Jet Lagos Expo Black Blue

OPTIONAL UPCHARGE APPLICABLE			
FINISH (INNER SHELL)			
UltraVelour Matte Finish (White Only)	\$		
DECK COLOR			
Optional Quasar Piatra Emperado Tuscan Statuario Dawn Maximus	\$		
CONTROL (TMU ONLY)			
MiaMulti® (uninstalled)	\$		
WASTE & OVERFLOW			
Chrome	\$		
White	\$		
Brass	\$		
Brushed nickel, Polished nickel & Oil-rubbed bronze	\$		
TILE FLANGE (specify front or back)			
Ordered with bath, uninstalled	\$		
Factory installed	\$		
DON'T FORGET THAT THIS MODEL IS AVAILABLE IN WHITE ON	IN WITH CHOICE OF DECK COLOR		



DON'T FORGET THAT THIS MODEL IS AVAILABLE IN **WHITE ONLY WITH CHOICE OF DECK COLOR.** DON'T FORGET TO SPECIFY **THE FINISH OF THE INTEGRATED WASTE & OVERFLOW.**



MONARCH 7238F 72" X 38" X 21"


ACCESSORIES (OPTIONAL)


OTHER Control cannot be installed on the quartz deck.

TOTAL PRICE

\$

DROP-IN/ALCOVE INSTALLATION

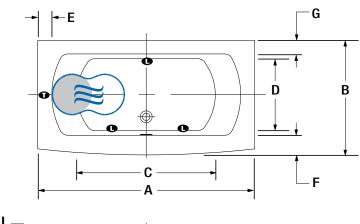



LETTER	DESCRIPTION	MEASURE
Α	Total length	72"
В	Total width	38"
С	Bathing well length (at height of jets)	47 1/4''
D	Bathing well width (at height of jets)	24 1/4"
E	Deck width (backrest)	4 7/8"
F	Deck width (straight side)	4 5/8"
G	Deck width (curved side)	6 5/8"
Н	Tub height	21"
I	Height from waste to center of overflow	15 3/4"
J	Outside edge to center waste	12 5/8"
K	Slope of backrest	26°
L	Quartz deck height	3/4"

Indicates turbine position (TMU)

Indicates LED light position

Indicates WarmTouchShell position (TUB)

Indicates heated backrest (TMU)

TECHNICAL SPECIFICATIONS

Hot water supply required	Should be 70% of water capacity of tub or greater.
Turbine	Access to the pump must be at least 18" X 22". Standard connection is 20 A. 120 V, 60 hz , dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option , a second line is needed 15 A. 120 V, 60 hz , dedicated line with a GFCI.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/documentation/documentation).

Approx. shipping weight	270 lbs
Turbine power	600 W
Air heater	600 W

WARRANTY	
Controls-LED-Geysair*	5 years
Quartz Deck*	15 years
Bath & turbine*	20 years

*Some restrictions apply | www.bainultra.com/warranty





The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" $[0.64\ cm]$ variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.