

	FREESTANDING	
THERMOMASSEUR® BATH	\$	
TUB no therapy	\$	

THERMOMASSEUR (TMU)	
Jets	40
1 heated backrest	included
MiaPlus® Control * (not installed)	included
Geysair®	included
AromaCloud®	N/A
Chromatherapy - 2 LED	\$

TUB no therapy		
AromaCloud®	N/A	
Chromatherapy - 2 LED	\$	
WarmTouchShell®	\$	
DOT control (not installed)	included with therapy	

FEATURES	EATURES		
Installation		Fr	eestanding
No. of bathers	*	Integrated waste & overflow	inst. & incl.
US gallons	45		
Imp. gallons	38		
INTEGRATED WASTE & OVERFLOW			
Chrome, White			
Brass, Brushed Nickel, Polished Nickel			

FEATURES INCLUDED
COLOR
Standard
White
OPTIONAL UPCHARGE APPLICABLE

FINISH		
UltraVelour Matte Finish (White Only)**	\$	
CONTROL [*] (TMU ONLY)		
MiaMulti®	\$	
AIR INTAKE** & ISLAND TUB DRAIN [™] ***		
Air intake & Island Tub Drain [™]	\$	
Island Tub Drain ^{™‡}	\$	
Air intake	\$	
Air intake installation	\$	
NOKORI SPECIAL TILE FLANGE		
Tile flange uninstalled	\$	
DON'T FORGET THAT THIS TUB IS AVAILABLE IN WHITE ONLY.		

** AIR INTAKE AND ACCESS TO ELECTRONICS ARE REQUIRED. IF TURBINE IS INSTALLED UNDER THE BATH, PLEASE FOLLOW THE TURBINE INSTALLATION UNDER THE BATH SECTION IN THE NOKORI INSTALLATION INSTRUCTIONS. *** AN ISLAND TUB DRAIN" IS REQUIRED WHEN THERE IS NO ACCESS UNDER THE BATH. ‡ FOR THIS MODEL, THE ISLAND TUB DRAIN IS COMPATIBLE ONLY WITH BRASS

WASTE & OVERFLOW KIT (BDRCOB) AND BRASS WASTE KIT (BDRCB).



1 800 463.2187 🔮 info@bainultra.com


From 8 a.m. to 8 p.m. Monday to Thursday (EST) From 8 a.m. to 5 p.m. on Friday (EST)

NOKORI 5827 58" x 27" x 23"

ACCESSORIES (OPTIONAL)

OTHERS	 Faucet must be freestanding or wall-mounted. Controls cannot be installed on the bath. The turbine should be remotely installed. The turbine can also be installed under the bath. Please refer to the Nokori Installation Instructions - Turbine Installation under the bath. 	TOTAL PRICE	\$
UTILKS			

FREESTANDING INSTALLATION

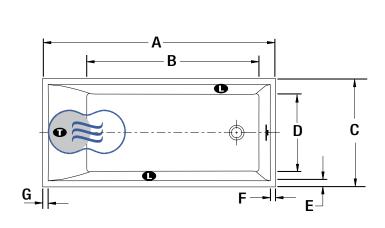


LETTER	DESCRIPTION	MEASURE
Α	Total length	58"
в	Bathing well length	43 1/4"
С	Total width	27"
D	Bathing well width	19 5/8"
E	Deck width	1 3/4''
F	Deck width at waste end	1 3/4"
G	Deck width at backrest	1 1/2''
н	Slope of backrest	24°
I	Outside edge to center of waste	9 3/4''
J	Height from waste to top of deck	19"
к	Maximum water level	14 7/8''
L	Total height	23"

Indicates LED light position
 Indicates WarmTouchShell position

Indicates turbine position (TMU)
 Indicates heated backrest (TMU)





TECHNICAL SPECIFICATIONS

Hot water supply required	Should be 70% of water capacity of tub or greater.
Turbine	Access to the pump must be at least 18" X 22". Standard connection is 20 A. 120 V, 60 hz , dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option , a second line is needed 15 A. 120 V, 60 hz , dedicated line with a GFCI. Air vent necessary: 8 sq. in. minimum

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/documentation/documentation).

The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra[®] assumes no responsibility for preparatory work done prior to the product being on site.

Approx. shipping weight	225 lbs
Turbine power	600 W
Air heater	600 W

WARRANTY

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

*Some restrictions apply | www.bainultra.com/warranty

