

THERMOMASSEUR® BATH	\$
THERMASENS® BATH	\$
TUB	\$

THERMOMASSEUR (TMU)		
Jets	35	
1 heated backrest	included	
MiaPlus® Control (uninstalled)	included	
Geysair®	included	
AromaCloud®	\$	
Chromatherapy - 3 LED	\$	
2 <sup>nd</sup> heated backrest	\$	

THERMASENS (TMSU)		
AromaCloud®	included	
Chromatherapy - 3 LED	included	
WarmTouchShell®	included	
DOT control	included	
2 <sup>nd</sup> WarmTouchShell®	\$	

ΤL	JB
	\$
	\$
	\$
	included with therapy
	\$

FEATURES			
Installation	Freestanding		
No. of bathers	**	Imp. gallons	42
US gallons	51	Integrated waste & overflow	inst. & incl.
INTEGRATED WASTE & OVERFLOW			
Chrome, White			
Brass, Brushed Nickel, Polis	hed Nickel		

FEATURES (INCLUDED)	
COLOR	
Standard White	

OPTIONAL UPCHARGE APPLICABLE		
FINISH		
UltraVelour Matte Finish (White Only)	\$	
CONTROL (TMU ONLY)		
MiaMulti®(uninstalled)	\$	

DON'T FORGET THAT THIS MODEL IS AVAILABLE IN WHITE ONLY.


DON'T FORGET TO SPECIFY THE FINISH OF THE INTEGRATED WASTE & OVERFLOW.



## OPALIA 6839 OFF-CENTERED ELLIPSE - LEFT 68" X 39" X 25"

ACCESSORIES (OPTIONA	L)		
CUTTING TEMPLATE	#90000073	OTHERS	- Faucet must be freestanding or wall-mounted The turbine must be remotely installed.
		TOTAL PRICE	\$

## FREESTANDING INSTALLATION

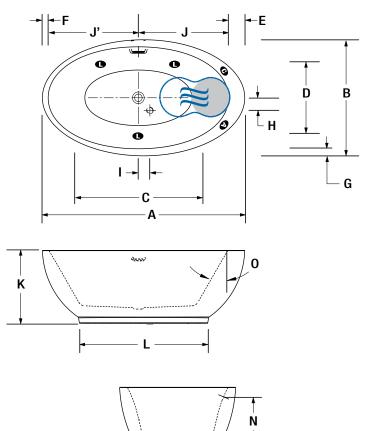

LETTER	DESCRIPTION ME	ASURE
Α	Total length	68"
В	Total width	39"
С	Bathing well length (at height of jets)	41 5/8"
D	Bathing well width (at height of jets)	23 5/8"
E	Deck width (backrest)	5 1/2"
F	Deck width (feet)	2"
G	Deck width (sides)	2 3/8"
Н	Distance from air intake to center of waste (long axis)	4 1/4"
I	Distance from air intake to center of waste (trans. axis)	3 7/8"
J	Distance from center of waste to edge of backrest	35 3/4"
J'	Distance from center of waste to edge of backrest	32 1/4"
K	Tub height	24 3/4"
L	Length of the base	43"
М	Width of the base	24"
N	Height from waste to center of overflow	16"
0	Slope of backrest	31º

Indicates turbine position (TMU)

Indicates LED light position
Indicates heated backrest (TMU)

	N ↓
M—→	

TECHNICAL SPECIFICATIONS		
Hot water supply required	Should be 70% of water capacity of tub or greater.	
Turbine	Access to the pump must be at least 18" X 22". <b>Standard connection is 20 A. 120 V, 60 hz</b> , dedicated line with a Ground-Fault Circuit Interrupter (GFCI). <b>For any additional option</b> , a <b>second line is needed 15 A. 120 V, 60 hz</b> , dedicated line with a GFCI.	
	installed by certified professionals only and according to our Owner's Manual as well as federal, ocal building codes and regulations (www.bainultra.com/documentation/documentation).	

Approx. shipping weight	230 lbs
Turbine power	600 W
Air heater	600 W

WARRANTY	
Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

<sup>\*</sup>Some restrictions apply | www.bainultra.com/warranty





The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.