



PRODUCT SHEET  
**ORIGAMI 6838** DESIGN SERIES (FREESTANDING)  
 68" X 38" X 22"



**FREESTANDING**

<b>THERMOMASSEUR® BATH</b>	\$
<b>THERMASENS® BATH</b>	\$
<b>TUB no therapy</b>	\$

**THERMOMASSEUR (TMU)**

Jets	42
1 heated backrest	included
MiaPlus® Control	included
Geysair®	included
AromaCloud®	\$
Chromatherapy - 2 LED	\$

**THERMASENS (TMSU)**

AromaCloud®	included
Chromatherapy - 2 LED	included
WarmTouchShell®	included
DOT control	included

**TUB**

\$
\$
\$
included with therapy

**FEATURES**

Installation	Freestanding		
No. of bathers	↓	Imp. gallons	43
US gallons	52	Waste & overflow (16x35)	inst. & incl.

**OPTIONAL UPCHARGE APPLICABLE**

**COLOR**

**Standard**



**Optional**



**FINISH**

UltraVelour Matte Finish (White Only)	\$
---------------------------------------	----

**CONTROL (TMU ONLY)**

MiaMulti®	\$
-----------	----

**INTEGRATED WASTE & OVERFLOW**

White	\$
Biscuit	\$
Chrome	\$
Brass	\$
Brushed & Polished nickel	\$

**DON'T FORGET TO SPECIFY THE FINISH OF THE WASTE & OVERFLOW.**

1 800 463.2187   
 info@bainultra.com

From 8 a.m. to 8 p.m. Monday to Thursday (EST)  
 From 8 a.m. to 5 p.m. on Friday (EST)

# ORIGAMI 6838 DESIGN SERIES (FREESTANDING) 68" X 38" X 22"

## ACCESSORIES (OPTIONAL)

CUTTING TEMPLATE

# 90000054

OTHERS




- Faucets must be freestanding or wall-mounted.
- The turbine must be remotely installed.

TOTAL PRICE

\$

## FREESTANDING INSTALLATION

Ⓐ Deck slightly modified to host the AromaCloud.

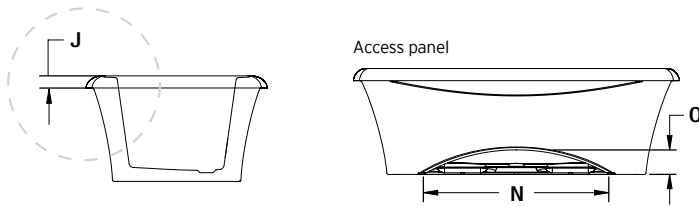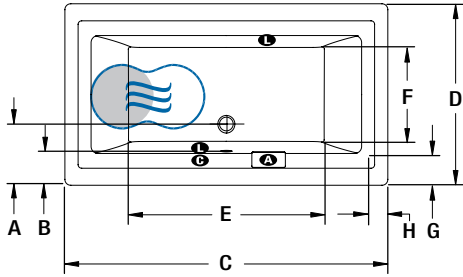

LETTER	DESCRIPTION	MEASURE
A	Outside edge to center drain	12 3/4"
B	Outside edge to overflow	7"
C	Total length	68"
D	Total width	38"
E	Bathing well length	42 1/8"
F	Bathing well width	20 3/8"
G	Deck width at drain end	6 1/8"
H	Deck width at backrest end	4"
I	Height from bottom of tub to top deck	22 1/8"
J	Height from bottom of lip to top deck	2 1/2"
K	Height from drain to center of overflow	16 1/2"
L	Maximum water level	14 3/4"
M	Slope of backrest	24°
N	Width of access panel opening	38 3/4"
O	Height of access panel opening	5 1/8"

Ⓘ Indicates LED light position

● Indicates heated backrest (TMU)

☰ Indicates WarmTouchShell position (TMSU)

Ⓐ Indicates AromaCloud position

Ⓑ Indicates control position when factory-installed (Mia or Dot)

## TECHNICAL SPECIFICATIONS

**Hot water supply required** Should be 70% of water capacity of tub or greater.

**Turbine** Access to the pump must be at least 18" X 22". **Standard connection is 20 A, 120 V, 60 hz**, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). **For any additional option, a second line is needed 15 A, 120 V, 60 hz**, dedicated line with a GFCI. Air vent necessary: 2" X 4" minimum

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations ([www.bainultra.com/documentation/documentation](http://www.bainultra.com/documentation/documentation)).

**Approx. shipping weight** 220 lbs

**Turbine power** 600 W

**Air heater** 700 W

## WARRANTY

Controls-LED-Geysair\* 5 years

Bath & turbine\* 20 years

\*Some restrictions apply | [www.bainultra.com/warranty](http://www.bainultra.com/warranty)



The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0,64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.