

# PRODUCT SHEET

# CHARISM 5736

57" X 36" X 23"



<b>THERMOMASSEUR® BATH</b>	\$
<b>TUB</b>	\$


THERMOMASSEUR (TMU)	
Jets	35
1 heated backrest	included
MiaMulti® Control*	included
Geysair®	included
AromaCloud®	N/A
Chromatherapy - 2 LED	\$


TUB no therapy	
AromaCloud®	N/A
Chromatherapy - 2 LED	\$
WarmTouchShell®	\$
DOT control	included with therapy

FEATURES			
Installation	Freestanding		
No. of bathers	↓	Integrated waste & overflow	inst. & incl.
US gallons	49		
Imp. gallons	41		
INTEGRATED WASTE & OVERFLOW			
Chrome, White			
Brass, Brushed Nickel, Polished Nickel			

FEATURES (INCLUDED)	
COLOR	
<b>Standard</b>	
<input type="checkbox"/>	White
DECK COLOR	
<b>Standard</b>	
<input type="checkbox"/>	White
<input type="checkbox"/>	Black

OPTIONAL UPCHARGE APPLICABLE	
FINISH	
UltraVelour Matte Finish (White Only)	\$
DECK COLOR	
<b>Optional</b>	
<input type="checkbox"/>	Rock Cristal
<input type="checkbox"/>	Copper
	\$
ISLAND TUB DRAIN™**	
Island Tub Drain™	\$

 DON'T FORGET THAT THIS MODEL IS AVAILABLE IN WHITE ONLY WITH CHOICE OF DECK COLOR. DON'T FORGET TO SPECIFY THE FINISH OF THE INTEGRATED WASTE & OVERFLOW: P. 10  
 \* CONTROL AND FAUCET CANNOT BE INSTALLED ON THE DECK OF THE BATH.  
 \*\* AN ISLAND TUB DRAIN IS REQUIRED WHEN THERE IS NO ACCESS UNDER THE BATH. FOR CHARISM 5736, THE ISLAND TUB DRAIN IS COMPATIBLE ONLY WITH BRASS WASTE & OVERFLOW KIT (BDRCOB) AND BRASS WASTE KIT (BDRCB).

1 800 463.2187  info@bainultra.com | From 8 a.m. to 8 p.m. Monday to Thursday (EST)  
 From 8 a.m. to 5 p.m. on Friday (EST)

# CHARISM 5736 57" X 36" X 23"

## ACCESSORIES (OPTIONAL)

CUTTING TEMPLATE

# 90000070


### OTHERS

- Faucet must be freestanding or wall-mounted.
- The turbine must be remotely installed.
- Controls cannot be installed on the bath.

TOTAL PRICE

\$

## FREESTANDING INSTALLATION


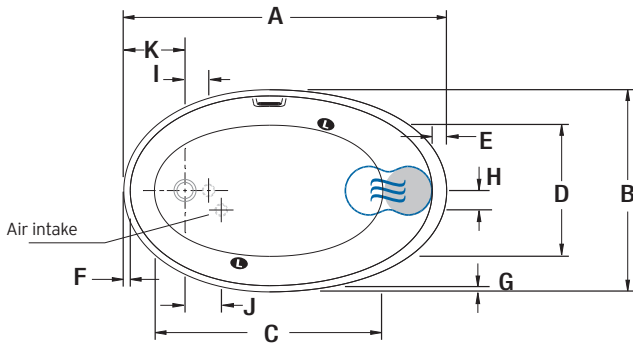


LETTER	DESCRIPTION	MEASURE
A	Total length	57 1/4"
B	Total width	35 7/8"
C	Bathing well length	41 1/2"
D	Bathing well width	23 7/8"
E	Deck width at headrest	2 5/8"
F	Deck width (waste end)	1 1/8"
G	Deck width	1 1/8"
H	Center tub waste to air intake	3 1/2"
I	Center tub waste to waste hole	4 1/4"
J	Center tub waste to air intake	6 1/2"
K	Tub outside edge to center tub waste	10 3/4"
L	Total height	23 1/4"
M	Slope at waste end	12°
N	Slope of backrest	31°
O	Base length	47 3/8"
P	Base width	26 7/8"
Q	Height from waste to center of overflow	16"

**L** Indicates LED light position

**●** Indicates heated backrest (TMU)

**⊕** Indicates WarmTouchShell position (TMSU)

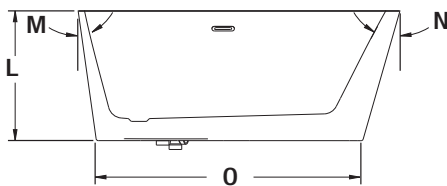

## TECHNICAL SPECIFICATIONS

**Hot water supply required** Should be 70% of water capacity of tub or greater.

**Turbine** Access to the pump must be at least 18" X 22". **Standard connection is 20 A, 120 V, 60 hz,** dedicated line with a Ground-Fault Circuit Interrupter (GFCI). **For any additional option, a second line is needed 15 A, 120 V, 60 hz,** dedicated line with a GFCI. Air vent necessary: 2" X 4" minimum

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations ([www.bainultra.com/documentation/documentation](http://www.bainultra.com/documentation/documentation)).

**Approx. shipping weight** 210 lbs

**Turbine power** 600 W

**Air heater** 600 W

### WARRANTY

Controls-LED-Geysair\* 5 years

Bath & turbine\* 20 years

\*Some restrictions apply | [www.bainultra.com/warranty](http://www.bainultra.com/warranty)



The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0,64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.