

PRODUCT SHEET

THALASSA 50

60" X 31" X 19"



THERMOMASSEUR® BATH	\$
THERMASENS® BATH	\$
TUB	\$

THERMOMASSEUR (TMU)	
Jets	36
1 heated backrest	included
Mia® Control	included
Geysair®	included
AromaCloud®	\$
Chromatherapy - 2 LED	\$

THERMASENS (TMSU)		TUB
AromaCloud®	included	\$
Chromatherapy - 2 LED	included	\$
WarmTouchShell®	included	\$
DOT control	included	included with therapy

FEATURES			
Installation	Drop-in or Alcove (3 walls)		
No. of bathers	↓	Armrests	2
US gallons	41	Grab bars (color match)	2
Imp. gallons	34	Integrated tile flange	included

OPTIONAL UPCHARGE APPLICABLE

COLOR	
Standard	
White	Biscuit
Optional	
Black	Sandbar
	Gray
	\$

CONTROL (TMU ONLY)	
MiaPlus®*	\$
MiaMulti®	\$
SKIRT	
	MULTIFIT
	SJ-1
Skirt	\$
Optional color	\$

CLEAR ACRYLIC GRAB BARS	
With Chrome, Brass or Brushed nickel inserts	\$
WASTE & OVERFLOW	16" X 35"
Chrome	\$
White & Biscuit	\$
Brass	\$
Brushed nickel, Polished nickel & Oil-rubbed bronze	\$

DON'T FORGET THAT AN INTEGRATED TILE FLANGE IS AVAILABLE AT NO EXTRA COST. YOU MUST SPECIFY DRAIN POSITION, INDICATE CONTROL COLOR, WHITE OR BISCUIT.
* THE MIA PLUS CONTROL IS INCLUDED WHEN PURCHASING CHROMATHERAPY ON A TMU.

1 800 463.2187
info@bainultra.com

From 8 a.m. to 8 p.m. Monday to Thursday (EST)
From 8 a.m. to 5 p.m. on Friday (EST)

BainUltra®
The quest for your wellness™
www.bainultra.com

THALASSA 50 60" X 31" X 19"

ACCESSORIES (OPTIONAL)




OTHERS

- There is a height difference for the integrated tile flange (see drawing Detail A).
- Available with or without integrated tile flange (specify right or left) at the same price.

TOTAL PRICE

\$

DROP-IN/CORNER INSTALLATION

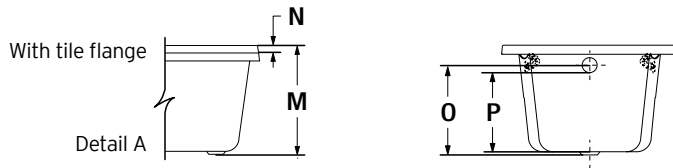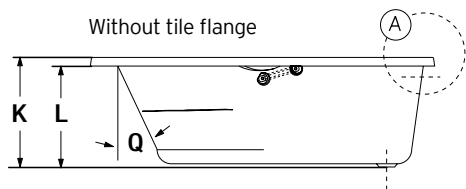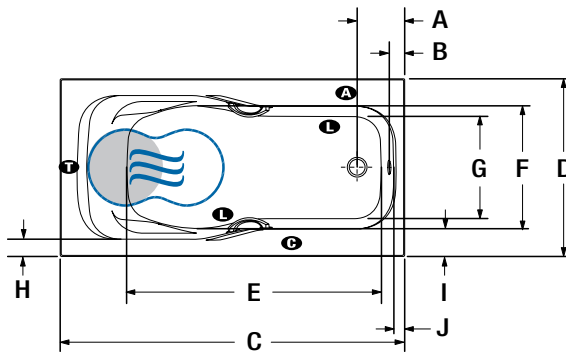

LETTER	DESCRIPTION	MEASURE
A	Outside edge to center drain	8 3/8"
B	Outside edge to overflow	2 3/8"
C	Total length	60"
D	Total width	31"
E	Bathing well length	44 3/8"
F	Bathing well width at seat area	21 1/4"
G	Bathing well width at foot area	17 3/4"
H	Deck width (narrowest point)	3 1/8"
I	Deck width (widest point)	4 7/8"
J	Deck width at drain end	2"
K	Height from bottom of tub to top deck	19 1/2"
L	Height from bottom of tub to bottom of lip	18"
M	Height from bottom of tub to top of tile flange	20 1/2"
N	Tile flange height	1"
O	Height from drain to center of overflow	15 5/8"
P	Maximum water level	13 3/4"
Q	Slope of backrest	25°

- T** Indicates turbine position (TMU)
- L** Indicates LED light position
- H** Indicates heated backrest (TMU)
- C** Indicates control position when factory-installed
- W** Indicates WarmTouchShell position (TMSU)
- A** Indicates AromaCloud position

When tiling flange is added, the AromaCloud will automatically be installed on the opposite side of the flange.

TECHNICAL SPECIFICATIONS

Hot water supply required	Should be 70% of water capacity of tub or greater.
Turbine	Access to the pump must be at least 18" X 22". Standard connection is 20 A, 120 V, 60 hz , dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 hz , dedicated line with a GFCI. Air vent necessary: 2" X 4" minimum

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/documentation/documentation).

Approx. shipping weight	104 lbs
Turbine power	755 W
Air heater	700 W

WARRANTY

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

*Some restrictions apply | www.bainultra.com/warranty



The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0,64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.