



PRODUCT SHEET  
**THERMAL 60**  
 72" X 36" X 20"



<b>THERMOMASSEUR® BATH</b>	\$
<b>THERMASENS® BATH</b>	\$
<b>TUB</b>	\$

THERMOMASSEUR (TMU)	
Jets	44
1 heated backrest	included
1 heated headrest	included
MiaPlus® Control	included
Geysair®	included
AromaCloud®	\$
Chromatherapy - 3 LED	\$
2 <sup>nd</sup> heated backrest (advanced technology)	\$

THERMASENS (TMSU)		TUB
AromaCloud®	included	\$
Chromatherapy - 3 LED	included	\$
WarmTouchShell®	included	\$
DOT control	included	included with therapy
2 <sup>nd</sup> WarmTouchShell®	\$	\$

FEATURES			
Installation			Drop-in
No. of bathers		Armrests	4
US gallons	53	Grab bar	1
Imp. gallons	44		

OPTIONAL UPCHARGE APPLICABLE	
<b>COLOR</b>	
<b>Standard</b>	
White	Biscuit
<b>Optional</b>	
Black	Sandbar
Gray	\$
<b>CONTROL (TMU ONLY)</b>	
MiaMulti®	\$
<b>CLEAR ACRYLIC GRAB BARS</b>	
With Chrome, Brass or Brushed nickel inserts	\$
<b>WASTE &amp; OVERFLOW</b> <span style="float: right;">16" X 35"</span>	
Chrome	\$
White, Biscuit	\$
Brass	\$
Brushed nickel, Polished nickel & Oil-rubbed bronze	\$

1 800 463.2187 info@bainultra.com | From 8 a.m. to 8 p.m. Monday to Thursday (EST)  
 From 8 a.m. to 5 p.m. on Friday (EST)

# THERMAL 60 72" X 36" X 20"

## ACCESSORIES (OPTIONAL)

### OTHERS



- Optional tile flange (specify right or left).
- Specify front or back drain.

### TOTAL PRICE

\$

## DROP-IN INSTALLATION

- A** For TMU, the AromaCloud will replace the control position.\*  
For TMSU, the AromaCloud and the DOT will be installed on the deck.

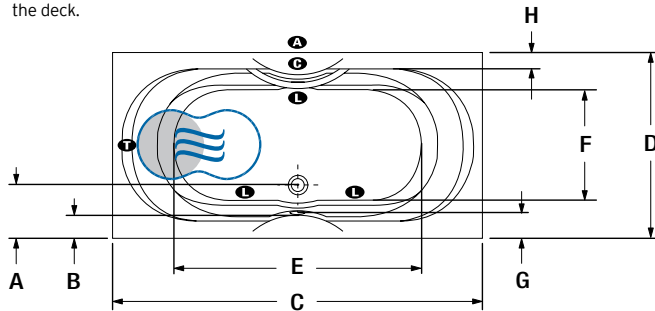

LETTER	DESCRIPTION	MEASURE
A	Outside edge to center drain	10 3/8"
B	Outside edge to overflow	4 1/4"
C	Total length	71 3/4"
D	Total width	36"
E	Bathing well length	48"
F	Bathing well width	22 1/4"
G	Deck width (widest point)	4 1/8"
H	Deck width (narrowest point)	3 1/4"
I	Total height to headrest	21 5/8"
J	Height from bottom of tub to top deck	20 1/8"
K	Height from bottom of tub to bottom of lip	18 5/8"
L	Height from drain to center of overflow	16"
M	Maximum water level	14 1/2"
N	Slope of backrest	26°
O	Slope of backrest	25°

- T** Indicates turbine position (TMU)
- B** Indicates heated backrest (TMU)
- W** Indicates WarmTouchShell position (TMSU)
- L** Indicates LED light position
- C** Indicates control position when factory-installed
- A** Indicates AromaCloud position

When tiling flange is added, the AromaCloud will automatically be installed on the opposite side of the flange.

## TECHNICAL SPECIFICATIONS

<b>Hot water supply required</b>	Should be 70% of water capacity of tub or greater.
<b>Turbine</b>	Access to the pump must be at least 18" X 22". <b>Standard connection is 20 A, 120 V, 60 hz,</b> dedicated line with a Ground-Fault Circuit Interrupter (GFCI). <b>For any additional option, a second line is needed 15 A, 120 V, 60 hz,</b> dedicated line with a GFCI. Air vent necessary: 2" X 4" minimum

<b>Approx. shipping weight</b>	134 lbs
<b>Turbine power</b>	600 W
<b>Air heater</b>	700 W

## WARRANTY

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

\*Some restrictions apply | [www.bainultra.com/warranty](http://www.bainultra.com/warranty)

The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0,64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.

