

PRODUCT SHEET
TMU 6060
 60" X 60" X 21"



THERMOMASSEUR® BATH	\$
THERMASENS® BATH	N/A
TUB	N/A

THERMOMASSEUR (TMU)	
Jets	58
1 heated backrest	included
1 heated headrest	included
MiaPlus® Control	included
Geysair®	\$
AromaCloud®	\$
Chromatherapy - 3 LED	\$
2 nd heated backrest (advanced technology)	\$

FEATURES			
Installation	Drop-in or Corner		
No. of bathers		Inverted V	2
US gallons	67	Armrests	2
Imp. gallons	56	Grab bars	2
Raised seats	2	Wood seat - shelf	included

COLOR	
Standard	
White	Biscuit

OPTIONAL UPCHARGE APPLICABLE			
COLOR			
Optional			\$
Black	Sandbar	Gray	
CONTROL			
MiaMulti®			\$
SKIRT		SJ-3 TMU 6060	
		(Step with wood insert)	(Without step)
Skirt	\$	\$	\$
Optional color	\$	\$	\$
STEP (ALONE)			
With wood insert			\$
Optional color			\$
CLEAR ACRYLIC GRAB BARS			
With Chrome, Brass or Brushed nickel inserts			\$
WASTE & OVERFLOW			16" X 35"
Chrome			\$
White & Biscuit			\$
Brass			\$
Brushed nickel, Polished nickel & Oil-rubbed bronze			\$
TILE FLANGE			
Ordered with bath, uninstalled			\$
Factory-installed			\$

DON'T FORGET THAT A STEP IS AVAILABLE TO COMPLETE THE ORDER.

1 800 463.2187 From 8 a.m. to 8 p.m. Monday to Thursday (EST)
 info@bainultra.com From 8 a.m. to 5 p.m. on Friday (EST)

TMU 6060 60" X 60" X 21"

ACCESSORIES (OPTIONAL)

CUTTING TEMPLATE

90000027



OTHERS

- Optional tile flange.
- Overall dimensions are 62 7/8" X 62 7/8" (see drawing for details).


TOTAL PRICE

\$

DROP-IN/CORNER INSTALLATION

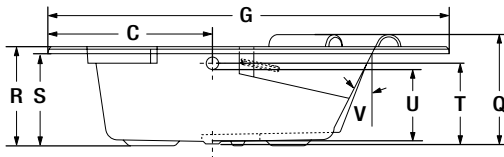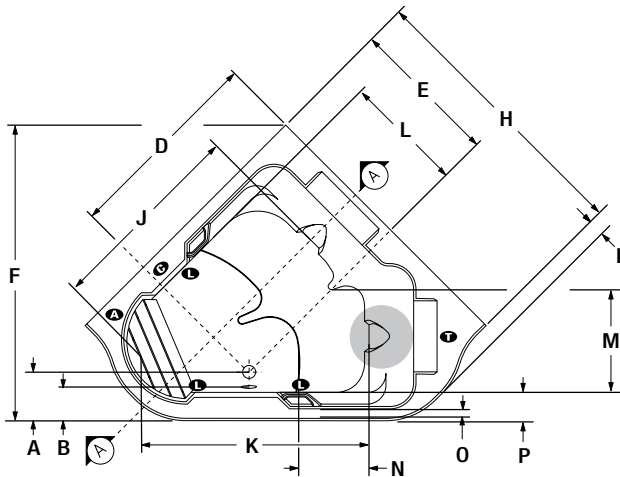

A section



LETTER	DESCRIPTION	MEASURE
A	Outside edge to center drain	12 3/8"
B	Outside edge to overflow	6 1/2"
C	Sidescorner to center drain	34 3/4"
D	Sidewall to center drain	41"
E	Sidewall to center drain	29 7/8"
F	Total length	62"
G	Total width	83 3/4"
H	Sidewall length	59 3/4"
I	Length from sidescorner to front curve	3 1/8"
J	Bathing well length	44"
K	Bathing well length	50"
L	Bathing well width	21 3/4"
M	Bathing well width	19 1/4"
N	Raised seat length	18 1/2"
O	Deck width (narrowest point)	1 5/8"
P	Deck width (widest point)	6"
Q	Total height to headrest	23 5/8"
R	Height from bottom of tub to top deck	21"
S	Height from bottom of tub to bottom of lip	19 1/2"
T	Height from drain to center of overflow	16 5/8"
U	Maximum water level	15 1/8"
V	Slope of backrest	30°
W	Slope of backrest	23°

- T** Indicates turbine position (TMU)
- C** Indicates control position when factory-installed
- Indicates heated backrest (TMU)

- L** Indicates LED light position
- A** Indicates AromaCloud position

TECHNICAL SPECIFICATIONS

Hot water supply required Should be 70% of water capacity of tub or greater.

Turbine Access to the pump must be at least 18" X 22". **Standard connection is 20 A, 120 V, 60 hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 hz, dedicated line with a GFCI. Air vent necessary: 2" X 4" minimum**

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/documentation/documentation).

The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0,64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.

Approx. shipping weight	191 lbs
Turbine power	755 W
Air heater	700 W

WARRANTY

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

*Some restrictions apply | www.bainultra.com/warranty

