

THERMOMASSEUR® BATH	\$
TUB	\$

THERMOMASSEUR (TMU)	
Jets	54
2 heated backrests (Independently controlled)	included
2 heated headrests (Independently controlled)	included
MiaPlus® Control	included
Geysair®	included
AromaCloud®	\$
Illuzio Chromatherapy <b>NEW</b>	\$

TUB (soaker)	
AromaCloud®	\$
Illuzio Chromatherapy <b>NEW</b>	\$
WarmTouchShell®	\$
DOT control	included with therapy
2 <sup>nd</sup> WarmTouchShell®	\$

FEATURES			
Installation types		Drop-in & Alcov	ve (3 walls)
No. of bathers	**	Inverted V	2
US gallons	50	Armrests	4
Imp. gallons	41	Grab bars (color match)	2
Raised seats	2		

OPTIONAL UPCHARG	E APPLI	CABLE		
COLOR				
Standard  White Biscuit				
Optional  Gray				\$
CONTROL (TMU ONLY	)			
MiaMulti®				\$
SKIRT	1	MULTIFIT		SJ-1
Skirt	\$		\$	
Optional color	\$		\$	
CLEAR ACRYLIC GRA	B BARS			
With Chrome, Brass or Brushed nickel inserts				\$
DRAIN & OVERFLOW		16" X 35"	IN WAST	ITEGRATED E & OVERFLOW
Chrome		\$	\$	
White, Biscuit		\$	\$	
Brass		\$	\$	
Brushed nickel, Polished nickel		\$	\$	
Oil-rubbed bronze	bbed bronze \$		N/A	
TILE FLANGE (specify fr	ont or ba	ck)		
Ordered with bath, uninstalled				\$
Factory-installed			Ś	



## AMMA 7236 72" X 36" X 21"


## **ACCESSORIES (OPTIONAL)**


**OTHER** Optional tile flange (specify front or back).

TOTAL PRICE

\$

## **DROP-IN/ALCOVE INSTALLATION**

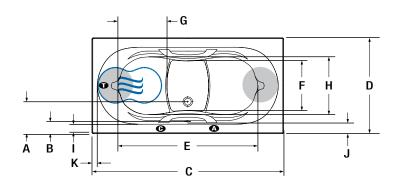



LETTER	DESCRIPTION	MEASURE
Α	Outside edge to center drain	12"
В	Outside edge to overflow	4 1/4"
С	Total length	72"
D	Total width	36"
E	Bathing well length	52 1/2"
F	Bathing well width at foot area	18 3/4"
G	Raised seat length	18 1/2"
Н	Raised seat width	21 3/4"
I	Deck width (narrowest point)	3 1/8"
J	Deck width (widest point)	4"
K	Deck width at backrest end end	2"
L	Total height to headrest	23 1/8"
М	Height from bottom of tub to top deck	21"
N	Height from bottom of tub to bottom of lip	19 1/2"
0	Height from drain to center of overflow	17"
P	Maximum water level	15 1/4"
Q	Slope of backrest	17°

AromaCloud position

Heated backrest (TMU)

Control position when factory-installed (Mia or Dot)

(≋) WarmTouchShell position

Turbine position (TMU)

When tiling flange is added, the AromaCloud will automatically be installed on the opposite side of the flange.

## TECHNICAL SPECIFICATIONS Hot water supply required Should be 70% of water capacity of tub or greater. Access to the pump must be at least 18" X 22". Standard connection is 20 A. 120 V, 60 hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A. 120 V, 60 hz, dedicated line with a GFCI. Air vent necessary: 2" X 4" minimum

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/documentation/documentation).

The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.

Approx. shipping weight	158 lbs
Turbine power	550 W
Air heater	600 W

WARRANTY	
Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

\*Some restrictions apply | www.bainultra.com/warranty



