PRODUCT SHEET **A OVAL** 7242 A 72" X 42" X 22"

Raised deck

THERMOMASSEUR® BATH	\$
тив	\$

THERMOMASSEUR (TMU)		
Jets	58	
2 heated backrests (Independently controlled)	included	
2 heated headrests (Independently controlled)	included	
MiaPlus® Control	included	
Geysair®	included	
AromaCloud®*	\$	
Illuzio Chromatherapy NEW	\$	

TUB (soaker)		
AromaCloud®*	\$	
Illuzio Chromatherapy NEW	\$	
WarmTouchShell®	\$	
DOT control	included with therapy	
2 nd WarmTouchShell®	\$	

FEATURES			
Installation types		Drop-in & U	ndermount*
No. of bathers	* *	Inverted V	2
US gallons	65	Armrests	4
Imp. gallons	54	Grab bars (color match)	2

2

OPTIONAL UPCHARGE APPL	ICABLE		
COLOR			
Standard			
White Biscuit			
Optional Gray		Ş	
CONTROL (TMU ONLY)			
MiaMulti®		\$	
CLEAR ACRYLIC GRAB BARS			
With Chrome, Brass or Brushed nicke	el inserts	\$	
WASTE & OVERFLOW 16" X 35"		INTEGRATED WASTE & OVERFLOW	
Chrome	\$	\$	
White, Biscuit	\$	\$	
Brass	\$	\$	
Brushed nickel, Polished nickel	\$	\$	
Oil-rubbed bronze	\$	N/A	

Flat deck

*THE AROMACLOUD IS NOT AVAILABLE WITH UNDERMOUNT INSTALLATION. DON'T FORGET TO INDICATE RAISED OR FLAT DECK.



1 800 463.2187 🔮 info@bainultra.com

Raised seats

From 8 a.m. to 8 p.m. Monday to Thursday (EST) From 8 a.m. to 5 p.m. on Friday (EST)


AMMA OVAL 7242 72" X 42" X 22"


CUTTING TEMPLATE

90000036

OTHERS	 Available with flat deck for undermounting or raised deck. There is a height difference for the flat deck (see drawing Detail A). With or without headrest (flat). 	
TOTAL PRICE	\$	

DROP-IN/UNDERMOUNT INSTALLATION

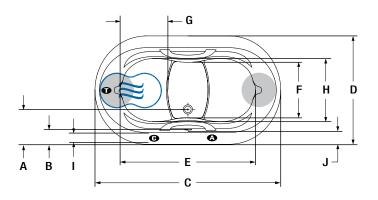




LETTER	DESCRIPTION	MEASUR
Α	Outside edge to center drain	13 1/2"
в	Outside edge to overflow	5 3/8"
с	Total length	72"
D	Total width	42"
E	Bathing well length	52 1/4"
F	Bathing well width at foot area	21 3/8"
G	Raised seat length	18 5/8"
н	Raised seat width	24"
I	Flat surface width	3 7/8''
J	Deck width	5 1/4''
к	Total height to headrest	24 3/8"
L	Height from bottom of tub to top deck	22 1/8''
м	Height from bottom of tub to bottom of lip	20 1/8"
N	Height from bottom of lip to top deck	2"
0	Height from drain to center of overflow	18 1/8"
Р	Maximum water level	16 ^{3/8} "
Q	Slope of backrest	18º

Turbine position (TMU)

ine position (TMU)



Available with raised or flat deck.

TECHNICAL SPECIFICATIONS

Hot water supply required	Should be 70% of water capacity of tub or greater.	
Turbine	Access to the pump must be at least 18" X 22". Standard connection is 20 A. 120 V, 60 hz , dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option , a second line is needed 15 A. 120 V, 60 hz , dedicated line with a GFCI. Air vent necessary: 2" X 4" minimum	

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/documentation/documentation).

The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4'' [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.

Approx. shipping weight	170 lbs
Turbine power	550 W
Air heater	600 W

WARRANTY

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

*Some restrictions apply | www.bainultra.com/warranty

