

THERMOMASSEUR® BATH	\$
TUB	\$

THERMOMASSEUR (TMU)		
Jets	38	
1 heated backrest	included	
MiaPlus® Control	included	
Geysair®	included	
AromaCloud®	\$	
Illuzio Chromatherapy NEW	\$	
2 nd heated backrest (advanced technology)	\$	

TUB (soaker)	
AromaCloud®	\$
Illuzio Chromatherapy NEW	\$
WarmTouchShell®	\$
DOT control	included with therapy
2 nd WarmTouchShell®	\$

FEATURES			
Installation types		Drop-in & Alcove (3 walls	for C12 only
No. of bathers	ŤŤ	Armrests	4
US gallons	52	Grab bars (color match)	2
Imp. gallons	44		

COLOR	
Standard	_
White Bi	iscuit

OPTIONAL UPCHARGE APP	LICABLE			
COLOR				
Optional				\$
Gray				
CONTROL (TMU ONLY)				
MiaMulti®				\$
SKIRT (WITH C12 ONLY)	MUI	TIFIT		SJ-1
Skirt	\$		\$	
Optional color	\$		\$	
GRAB BARS			G11 TALLIC	CLEAR ACRYLIC**
Chrome & Brass		\$		\$
Brushed & polished nickel		\$		\$
WASTE & OVERFLOW			014* GANCIA)	D13 (BALNEO®)
Chrome		\$		\$
White, Biscuit		\$		N/A
Brass		\$		\$
Brushed nickel & Polished nickel		\$		\$
Unplated & Oil-rubbed bronze			N/A	\$
TILE FLANGE (FOR C12 CONTOUR ONLY) (specify front or back)				
Ordered with bath, uninstalled				\$
Factory-installed				\$








ELEGANCIA 7236 72" X 36" X 21"

ACCESSORIES (OPTIONAL)

CUTTING TEMPLATE # 90000042 (C11, C13 & C14)

OTHER	- Optional tile flange for C12 contour (specify front or back).
TOTAL PRICE	\$

DROP-IN/ALCOVE INSTALLATION

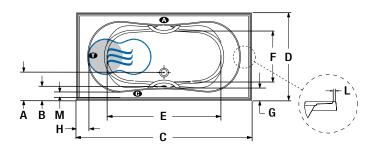



LETTER	DESCRIPTION	MEASURE
Α	Outside edge to center waste	11 5/8"
В	Outside edge to overflow	5 5/8"
С	Total length	72"
D	Total width	36 1/8"
E	Bathing well length	47 1/4''
F	Bathing well width	21 3/8"
G	Deck width (widest point)	5 1/4"
Н	Deck width at backrest end	5 1/8"
I	Height from waste to center of overflow	16"
J	Maximum water level	14 1/4"
K	Slope of backrest	30°
L	Flat contour width (narrowest point) C12 ONLY	0 3/8"

AromaCloud position

Heated backrest (TMU)

Control position when factory-installed (Mia or Dot)

₩armTouchShell position

Turbine position (TML

When tiling flange is added, the AromaCloud will automatically be installed on the opposite side of the flance

CHOOSE YOUR CONTOUR

LETTER DESCRIPTION		C10	C11	C12	C13	C14
М	Deck width (narrowest point)	1 7/8"	1 7/8"	1 1/2"	1 1/4"	1 5/8"
N	Height from bottom of tub to top deck	20 3/4"	20 5/8"	21"	20 5/8"	20 3/4"
0	Height from bottom of tub to bottom of lip	18 1/4"	17 5/8"	19"	18 5/8"	18 1/4"



DON'T FORGET TO SELECT A CONTOUR AMONG THE 5 AVAILABLE TO CHOOSE FROM.
* PIPING IS NOT INCLUDED FOR THIS MODEL (D14). ** SPECIFY INSERT FINISH.













TECHNICAL SPECIFICATIONS

Hot water supply required	Should be 70% of water capacity of tub or greater.
Turbine	Access to the pump must be at least 18" X 22". Standard connection is 20 A. 120 V, 60 hz , dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option , a second line is needed 15 A. 120 V, 60 hz , dedicated line with a GFCI. Air vent necessary: 2" X 4" minimum

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/documentation/documentation).

The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.

Approx. shipping weight	137 lbs
Turbine power	550 W
Air heater	600 W

WARRANTY	
Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

^{*}Some restrictions apply | www.bainultra.com/warranty



