



PRODUCT SHEET

ESSENCIA DESIGN

72" X 36" X 24"



FREESTANDING

THERMOMASSEUR® BATH	\$
TUB no therapy	\$

THERMOMASSEUR (TMU)

Jets	46
1 heated backrest	included
MiaPlus® Control *	included
Geysair®	included
Illuzio Chromatherapy NEW	\$

TUB (soaker)

AromaCloud®	N/A
Illuzio Chromatherapy NEW	\$
WarmTouchShell®	\$
DOT control	included with therapy

FEATURES

Installation type	Freestanding		
No. of bathers	2	Integrated waste & overflow	inst. & incl.
US gallons	55		
Imp. gallons	46		

INTEGRATED WASTE & OVERFLOW

Chrome, White
Brass, Brushed Nickel, Polished Nickel

FEATURES

COLOR

Standard



OPTIONAL UPCHARGE APPLICABLE

FINISH

UltraVelour Matte Finish (White Only)	\$
ISLAND TUB DRAIN™**	
Island Tub Drain™	\$



DON'T FORGET THAT THIS TUB IS AVAILABLE IN WHITE ONLY.
DON'T FORGET TO SPECIFY THE FINISH OF THE INTEGRATED WASTE & OVERFLOW.
 * CONTROL AND FAUCET CANNOT BE INSTALLED ON THE DECK OF THE BATH.
 ** AN ISLAND TUB DRAIN IS REQUIRED WHEN THERE IS **NO ACCESS UNDER THE BATH.**

1 800 463.2187
 info@bainultra.com

From 8 a.m. to 8 p.m. Monday to Thursday (EST)
 From 8 a.m. to 5 p.m. on Friday (EST)

 **BainUltra®**
 The quest for your wellness®
 www.bainultra.com

ESSENCIA DESIGN 72" X 36" X 24"

ACCESSORIES (OPTIONAL)

CUTTING TEMPLATE

90000071


OTHERS

- Faucet must be freestanding or wall-mounted.
- The turbine must be remotely installed.
- TMU: Control must be wall-mounted.

TOTAL PRICE

\$

FREESTANDING INSTALLATION

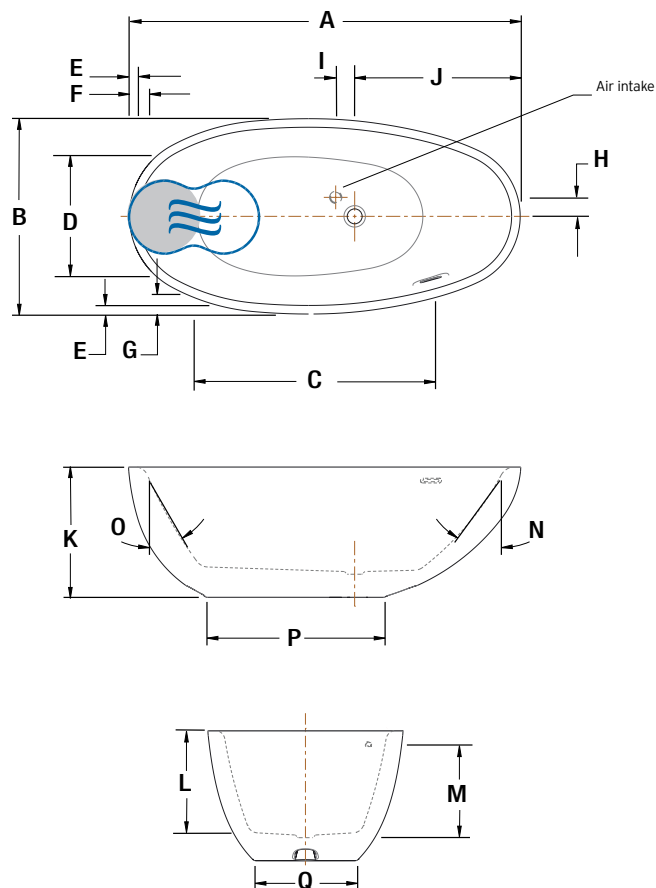

LETTER	DESCRIPTION	MEASURE
A	Total length	72"
B	Total width	36"
C	Bathing well length (at jets height)	44 7/8"
D	Bathing well width (at jets height)	22 5/8"
E	Deck width (top)	1 5/8"
F	Deck width (backrest round edge)	3 1/2"
G	Deck width (side round edge)	3 1/8"
H	Distance from center air intake to center drain (long axis)	3 1/2"
I	Distance from center air intake to center drain (trans axis)	3 1/2"
J	Distance from center drain to deck edge	30 1/2"
K	Bath height	24"
L	Height from drain to top of deck	19 1/4"
M	Height from drain to center of overflow	16 5/8"
N	Slope	40°
O	Slope of backrest	29°
P	Base length	32 3/8"
Q	Base width	19"

● Heated backrest (TMU)

WarmTouchShell position

TECHNICAL SPECIFICATIONS

Hot water supply required

Should be 70% of water capacity of tub or greater.

Turbine

Access to the pump must be at least 18" X 22". **Standard connection is 20 A. 120 V, 60 hz,** dedicated line with a Ground-Fault Circuit Interrupter (GFCI). **For any additional option, a second line is needed 15 A. 120 V, 60 hz,** dedicated line with a GFCI. Air vent necessary: 2" X 4" minimum

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/documentation/documentation).

Approx. shipping weight

305 lbs

Turbine power

550 W

Air heater

600 W

WARRANTY

Controls-LED-Geysair*

5 years

Bath & turbine*

20 years

*Some restrictions apply | www.bainultra.com/warranty



The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.