



PRODUCT SHEET

EVANESCENCE 5936

59" X 36" X 28"



FREESTANDING

THERMOMASSEUR® BATH	\$
TUB	\$

THERMOMASSEUR (TMU)	
Jets	35
1 heated backrest	included
1 heated headrest	included
MiaMulti® Control *	included
Geysair®	included
AromaCloud®	N/A
Illuzio Chromatherapy NEW	\$

TUB (soaker)	
AromaCloud®	N/A
Illuzio Chromatherapy NEW	\$
WarmTouchShell®	\$
DOT control	included with therapy

FEATURES			
Installation type	Freestanding		
No. of bathers	↓	Raised headrest	1
US gallons	49	Integrated waste & overflow	inst. & incl.
Imp. gallons	41		
WASTE & OVERFLOW			
Chrome, White			
Brass, Brushed Nickel, Polished Nickel			

FEATURES

COLOR

Standard



OPTIONAL UPCHARGE APPLICABLE

FINISH

UltraVelour Matte Finish (White Only)	\$
---------------------------------------	----

ISLAND TUB DRAIN™**

Island Tub Drain™	\$
-------------------	----



DON'T FORGET THAT THIS MODEL IS AVAILABLE IN **WHITE ONLY**.
DON'T FORGET TO SPECIFY THE FINISH OF THE INTEGRATED WASTE & OVERFLOW.
 * CONTROL AND FAUCET CANNOT BE INSTALLED ON THE DECK OF THE BATH.
 ** AN ISLAND TUB DRAIN IS REQUIRED WHEN THERE IS **NO ACCESS UNDER THE BATH**.

1 800 463.2187 info@bainultra.com

From 8 a.m. to 8 p.m. Monday to Thursday (EST)
 From 8 a.m. to 5 p.m. on Friday (EST)

BainUltra®

The quest for your wellness®

www.bainultra.com

EVANESCENCE 5936 59" X 36" X 28"

ACCESSORIES (OPTIONAL)

CUTTING TEMPLATE

90000069




OTHERS

- Faucet must be freestanding or wall-mounted.
- The turbine must be remotely installed.
- Controls cannot be installed on the bath.

TOTAL PRICE

\$

FREESTANDING INSTALLATION

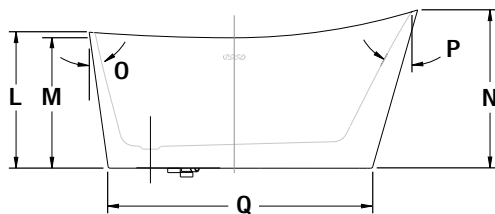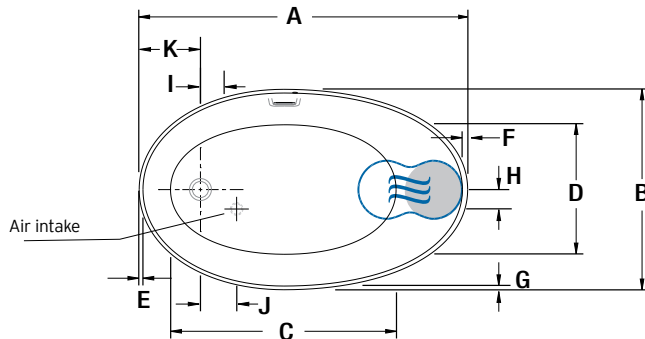

LETTER	DESCRIPTION	MEASURE
A	Total length	59"
B	Total width	36"
C	Bathing well length	41 1/2"
D	Bathing well width	23 7/8"
E	Deck width at waste end	1"
F	Deck width at headrest	1 1/8"
G	Deck width	1 1/8"
H	Center tub waste to air intake	3 1/2"
I	Center tub waste to waste hole	4 1/4"
J	Center tub waste to air intake	6 1/2"
K	Tub outside edge to center tub waste	11"
L	Total height	24 1/2"
M	Minimum height of bath	23 1/2"
N	Total height to headrest	28 1/2"
O	Slope at waste end	12°
P	Slope of backrest	31°
Q	Base length	47 3/8"
R	Base width	26 7/8"
S	Height from waste to center of overflow	16"

● Heated backrest (TMU)

☰ Indicates WarmTouchShell position

TECHNICAL SPECIFICATIONS

Hot water supply required Should be 70% of water capacity of tub or greater.

Turbine Access to the pump must be at least 18" X 22". **Standard connection is 20 A, 120 V, 60 hz,** dedicated line with a Ground-Fault Circuit Interrupter (GFCI). **For any additional option, a second line is needed 15 A, 120 V, 60 hz,** dedicated line with a GFCI. Air vent necessary: 2" X 4" minimum

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/documentation/documentation).

Approx. shipping weight 220 lbs

Turbine power 550 W

Air heater 600 W

WARRANTY

Controls-LED-Geysair* 5 years

Bath & turbine* 20 years

*Some restrictions apply | www.bainultra.com/warranty



The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0,64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.