

	ORIGINAL Quartz Deck with Seam	GRAND LUXURY One Piece Quartz Deck
THERMOMASSEUR® BATH	\$	\$
TUB	\$	\$

THERMOMASSEUR (TMU)	
Jets	40
1 heated backrest	included
MiaPlus® Control (uninstalled)	included
Geysair <sup>®</sup>	included
AromaCloud <sup>®</sup>	N/A
Illuzio Chromatherapy <b>NEW</b>	\$


TUB (soaker)	
Illuzio Chromatherapy <b>NEW</b>	\$
WarmTouchShell®	\$
DOT control	included with therapy

DOT control		inclu	ded with therapy
FEATURES			
Installation		Drop-in or	Alcove (3 walls)
No. of bathers	*	Imp. gallons	40
US gallons	48	Integrated waste & over	rflow inst. & incl.
INTEGRATED WASTE & OVERFLOW			
Chrome, White			
Brass, Brushed Nickel, Polished Nickel			
COLOR (INNER SHELL) QUARTZ DECK COLOR			
Standard	Standa	ard	

OPTIONAL UPCHARGE APPLICABLE		
FINISH (INNER SHELL)		
UltraVelour Matte Finish (White Only)	\$	
QUARTZ DECK COLOR		
Optional color  Quasar Piatra Bianco Woodlands Statuario Maximus	\$	
QUARTZ SKIRT	MONARCH SKIRT 6018	
Quartz Skirt Color (for all quartz finishes)	\$	
CONTROL (TMU ONLY)		
MiaMulti®(uninstalled)	\$	
WASTE & OVERFLOW (16" X 35")		
Chrome	\$	
White	\$	
Brass	\$	
Brushed nickel, Polished nickel & Oil-rubbed bronze	\$	
TILE FLANGE (specify left or right)		
Ordered with bath, uninstalled	\$	
Factory installed	\$	



DON'T FORGET THAT THIS MODEL IS AVAILABLE IN WHITE ONLY WITH CHOICE OF DECK COLOR.
DON'T FORGET TO SPECIE THE FINISH OF THE INTERCENTED WITHOUT THE PROPERTY OF THE PROPERTY O DON'T FORGET TO SPECIFY THE FINISH OF THE INTEGRATED WASTE & OVERFLOW.



White

From 8 a.m. to 8 p.m. Monday to Thursday (EST) From 8 a.m. to 5 p.m. on Friday (EST)



## MONARCH 6036 60" X 36" X 20"


## **ACCESSORIES (OPTIONAL)**

OTHER Control cannot be installed on the quartz deck.

TOTAL PRICE

\$

## DROP-IN/ALCOVE INSTALLATION

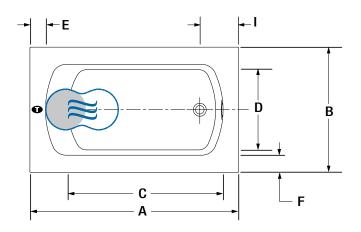



LETTER	DESCRIPTION	MEASURE
Α	Total length	60"
В	Total width	36"
С	Bathing well length (at height of jets)	42 3/8"
D	Bathing well width (at height of jets)	22 3/4"
E	Deck width (edges)	4 5/8"
F	Deck width (sides)	5 1/8"
G	Tub height	19 7/8"
Н	Height from waste to center of overflow	15 <sup>3/8</sup> "
I	Outside edge to center waste	11 1/8"
J	Slope of backrest	24°
K	Quartz deck height	3/4"

Turbine position (TMU)

Heated backrest (TMU)

WarmTouchShell position





## TECHNICAL SPECIFICATIONS

Hot water supply required	Should be 70% of water capacity of tub or greater.
Turbine	Access to the pump must be at least 18" X 22". <b>Standard connection is 20 A. 120 V, 60 hz</b> , dedicated line with a Ground-Fault Circuit Interrupter (GFCI). <b>For any additional option</b> , <b>a second line is needed 15 A. 120 V, 60 hz</b> , dedicated line with a GFCI.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/documentation/documentation).

Approx. shipping weight	244 lbs
Turbine power	550 W
Air heater	600 W

WARRANTY	
Controls-LED-Geysair*	5 years
Quartz Deck*	15 years
Bath & turbine*	20 years

\*Some restrictions apply | www.bainultra.com/warranty





The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4"  $[0.64\ cm]$  variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.