PRODUCT SHEET MONARCH 6037R 60" x 37" x 20"



	ORIGINAL Quartz Deck with Seam	GRAND LUXURY One Piece Quartz Deck
THERMOMASSEUR® BATH	\$	\$
тив	\$	\$

THERMOMASSEUR (TMU)	
Jets	40
1 heated backrest	included
MiaPlus® Control (uninstalled)	included
Geysair®	included
AromaCloud®	N/A
Illuzio Chromatherapy NEW	\$
TUB (soaker)	

Illuzio Chromatherapy NEW	\$
WarmTouchShell®	\$
DOT control	included with therapy

FEATURES			
Installation	Drop-in or Alcove (3 walls)		
No. of bathers	Imp. gallons		
US gallons	48 Integrated waste & overflow inst.		inst. & incl.
INTEGRATED WASTE & OVERFLOW			
Chrome, White			
Brass, Brushed Nickel, Polished Nickel			

COLOR (INNER SHELL) QUARTZ DECK COLOR

Grey Expo



Standa	rd		
			0.00
Grey	Noka	Jet	Lagos Blue
Exno		Black	Blue

OPTIONAL UPCHARGE APPLICABLE		
\$		
\$		
MONARCH SKIRT 6018		
\$		
\$		
\$		
\$		
\$		
\$		
\$		
\$		

DON'T FORGET THAT THIS MODEL IS AVAILABLE IN WHITE ONLY WITH CHOICE OF DECK COLOR. -**X**-DON'T FORGET TO SPECIFY THE FINISH OF THE INTEGRATED WASTE & OVERFLOW.



1 800 463.2187 🔮 info@bainultra.com

From 8 a.m. to 8 p.m. Monday to Thursday (EST) From 8 a.m. to 5 p.m. on Friday (EST)

MONARCH 6037R 60" X 37" X 20"

ACCESSORIES (OPTIONAL)


OTHER

Control cannot be installed on the quartz deck.

TOTAL PRICE


\$


DROP-IN/ALCOVE INSTALLATION

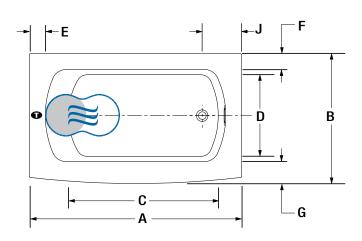

LETTER	DESCRIPTION	MEASURE
A	Total length	60"
в	Total width	36 3/4"
с	Bathing well length (at height of jets)	42 3/8"
D	Bathing well width (at height of jets)	22 3/4"
E	Deck width (edges)	4 5/8''
F	Deck width (straight side)	4 5/8"
G	Deck width (curved side)	6 ^{3/8} "
н	Tub height	19 7/8''
I	Height from waste to center of overflow	15 3/8"
J	Outside edge to center waste	11 1/8"
к	Slope of backrest	24º
L	Quartz deck height	3/4"

Turbine position (TMU)





TECHNICAL SPE	CIFICATIONS		
Hot water supply	Should be 70 % of water capacity of tub or greater.	Approx. shipping weight	
required		Turbine power	
Turbine	Access to the pump must be at least 18" X 22". Standard connection is 20 A. 120 V, 60 hz , dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option , a second line is needed 15 A. 120 V, 60 hz , dedicated line with a GFCI.	Air heater	
	e installed by certified professionals only and according to our Owner's Manual as well as federal, ocal building codes and regulations (www.bainultra.com/documentation/documentation).	WARRANTY	

Controls-LED-Geysair*	5 years	
Quartz Deck*	15 years	
Bath & turbine* 20 years		
*Some restrictions apply www.bainultra.com/warranty		

245 lbs 550 W

600 W

The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.



Heated backrest (TMU)
WarmTouchShell position