



PRODUCT SHEET

NOKORI 5827

58" X 27" X 23"



FREESTANDING

THERMOMASSEUR® BATH	\$
TUB	\$

THERMOMASSEUR (TMU)

Jets	40
1 heated backrest	included
MiaPlus® Control* (not installed)	included
Geysair®	included
AromaCloud®	N/A
Illuzio Chromatherapy NEW	\$

TUB (soaker)

AromaCloud®	N/A
Illuzio Chromatherapy NEW	\$
WarmTouchShell®	\$
DOT control (not installed)	included with therapy

FEATURES

Installation type	Freestanding		
No. of bathers		Integrated waste & overflow	inst. & incl.
US gallons		45	
Imp. gallons	38		

INTEGRATED WASTE & OVERFLOW

Chrome, White
Brass, Brushed Nickel, Polished Nickel

FEATURES

COLOR

Standard



White

OPTIONAL UPCHARGE APPLICABLE

FINISH

UltraVelour Matte Finish (White Only)	\$
---------------------------------------	----

CONTROL* (TMU ONLY)

MiaMulti®	\$
-----------	----

AIR INTAKE** & ISLAND TUB DRAIN***

Air intake & Island Tub Drain™	\$
Island Tub Drain™	\$
Air intake	\$
Air intake installation	\$

NOKORI SPECIAL TILE FLANGE (SPECIFY POSITION)

Ordered with bath, uninstalled	\$
Factory installed	\$



DON'T FORGET THAT THIS TUB IS AVAILABLE IN **WHITE ONLY**.

* CONTROL AND FAUCET CANNOT BE INSTALLED ON THE DECK OF THE BATH.

** AIR INTAKE AND ACCESS TO ELECTRONICS ARE REQUIRED.

*** IF TURBINE IS INSTALLED UNDER THE BATH, PLEASE FOLLOW THE **TURBINE INSTALLATION UNDER THE BATH SECTION** IN THE **NOKORI INSTALLATION INSTRUCTIONS**.

*** AN ISLAND TUB DRAIN™ IS REQUIRED WHEN THERE IS NO ACCESS UNDER THE BATH.

1 800 463.2187
 info@bainultra.com

From 8 a.m. to 8 p.m. Monday to Thursday (EST)
 From 8 a.m. to 5 p.m. on Friday (EST)

BainUltra®

The quest for your wellness™

www.bainultra.com

NOKORI 5827 58" X 27" X 23"

ACCESSORIES (OPTIONAL)


OTHERS

- Faucet must be freestanding or wall-mounted.
- Controls cannot be installed on the bath.
- The turbine should be remotely installed.
- The turbine can also be installed under the bath. Please refer to the Nokori Installation Instructions - Turbine Installation under the bath.

TOTAL PRICE

\$

FREESTANDING INSTALLATION


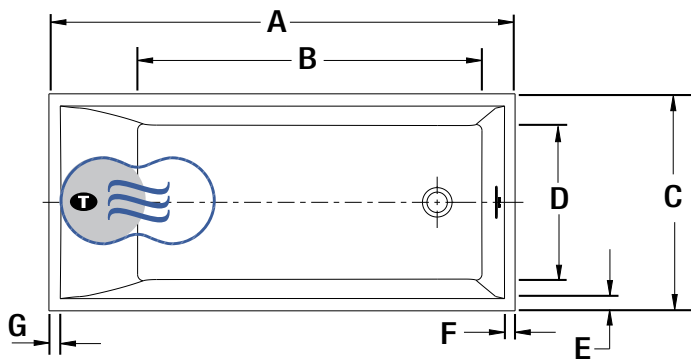


LETTER	DESCRIPTION	MEASURE
A	Total length	58"
B	Bathing well length	43 1/4"
C	Total width	27"
D	Bathing well width	19 5/8"
E	Deck width	1 3/4"
F	Deck width at waste end	1 3/4"
G	Deck width at backrest	1 1/2"
H	Slope of backrest	24°
I	Outside edge to center of waste	9 3/4"
J	Height from waste to top of deck	19"
K	Maximum water level	14 7/8"
L	Total height	23"

T Turbine position (TMU)

TMU Heated backrest (TMU)

WTS WarmTouchShell position

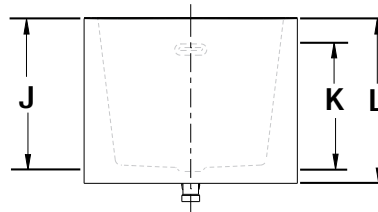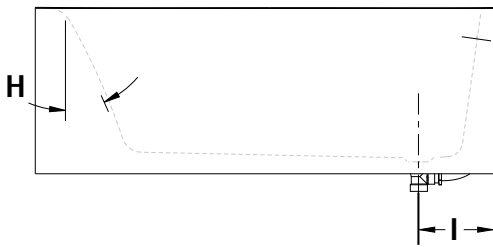

TECHNICAL SPECIFICATIONS

Hot water supply required Should be 70% of water capacity of tub or greater.

Turbine Access to the pump must be at least 18" X 22". **Standard connection is 20 A, 120 V, 60 hz,** dedicated line with a Ground-Fault Circuit Interrupter (GFCI). **For any additional option, a second line is needed 15 A, 120 V, 60 hz,** dedicated line with a GFCI. Air vent necessary: 8 sq. in. minimum

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/documentation/documentation).

Approx. shipping weight 225 lbs

Turbine power 550 W

Air heater 600 W

WARRANTY

Controls-LED-Geysair* 5 years

Bath & turbine* 20 years

*Some restrictions apply | www.bainultra.com/warranty



The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0,64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.