

THERMOMASSEUR® BATH	\$
тив	\$

THERMOMASSEUR (TMU)	
Jets	44
1 heated backrest	included
MiaPlus® Control	included
Geysair [®]	included
AromaCloud [®]	\$
Illuzio Chromatherapy NEW	\$
2 nd heated backrest (advanced technology)	\$

TUB (soaker)		
AromaCloud®	\$	
Illuzio Chromatherapy NEW	\$	
WarmTouchShell®	\$	
DOT control	included with therapy	
2 nd WarmTouchShell®	\$	

FEATURES				
Installation types		Drop-in: 1/2", 2" & 5" Undermount & Alcove (3 walls): 2"		
No. of bathers	**	Imp. gallons	60	
US gallons	72			

OPTIONAL UPCHARGE AP	PLICABL	Ε		
COLOR				
Standard				
White Biscuit				
Optional Gray				\$
FINISH				
UltraVelour Matte Finish (White C	Only)			\$
CONTROL (TMU ONLY)				
MiaMulti®				\$
SKIRT (2" LIP ONLY)		MUL	TIFIT	SJ-1
Skirt		\$		\$
Optional color		\$		\$
WASTE & OVERFLOW	16"	x 35"	WAS	INTEGRATED TE & OVERFLOW
White, Biscuit	\$			\$
Chrome	\$			\$
Brass	\$			\$
Brushed & Polished nickel	\$			\$
Oil-rubbed bronze \$				N/A
TILE FLANGE WITH 2" LIP ONLY (specify front or back)			()	
Ordered with bath, uninstalled				\$
Factory-installed				\$




DON'T FORGET TO INDICATE THE DECK HEIGHT (1/2", 2" OR 5"). SPECIFY WASTE POSITION. SLIM DECK ARE AVAILABLE WITH DROP-IN INSTALLATION ONLY.



ORIGAMI 7242 ORIGINAL SERIES 72" X 42" X 22"

ACCESSORIES (OPTIONAL)			
CUTTING TEMPLATE	TE # 90000035		Optional tile flange with 2" lip height only (specify front or back).
		TOTAL PRICE	\$

ALCOVE/DROP-IN/UNDERMOUNT INSTALLATION

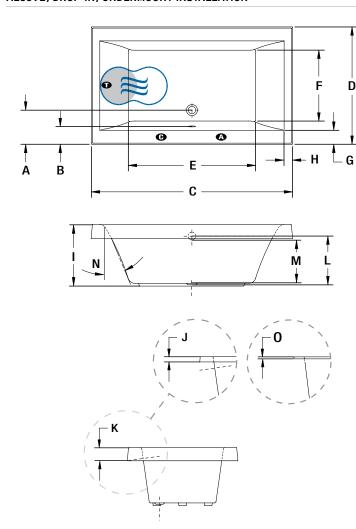

LETTER	DESCRIPTION	MEASURE
A	Outside edge to center drain	12 1/4"
В	Outside edge to overflow	5 3/8"
С	Total length (with 1/2" deck height) Total length (with 2" deck height) Total length (with 5" deck height)	71 ^{1/4} " 71 ^{5/8} " 72 ^{1/8} "
D	Total width (with 1/2" deck height) Total width (with 2" deck height) Total width (with 5" deck height)	41 1/4" 41 5/8" 42 1/8"
E	Bathing well length	45"
F	Bathing well width	26 1/4"
G	Deck width	5 3/8"
Н	Deck width at backrest end	3"
I	Height from bottom of tub to top deck	22"
J	Height from bottom of lip to top deck	2"
K	Height from bottom of lip to top deck	5"
L	Height from drain to center of overflow	17 1/8"
M	Maximum water level	16"
N	Slope of backrest	24°
0	Height from bottom of lip to top deck	1/2"

AromaCloud position

Heated backrest (TMU)

Control position when factory-installed (Mia or Dot)

₩armTouchShell position

Turbine position (TMU)

When tiling flange is added, the AromaCloud will automatically be installed on the opposite side of the flange.

TECHNICAL SPECIFICATIONS		
Hot water supply required	Should be 70% of water capacity of tub or greater.	
Turbine	Access to the pump must be at least 18" X 22". Standard connection is 20 A. 120 V, 60 hz , dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option , a second line is needed 15 A. 120 V, 60 hz , dedicated line with a GFCI. Air vent necessary: 2" X 4" minimum	

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/documentation/documentation).

The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.

Approx. shipping weight	140 lbs
Turbine power	550 W
Air heater	600 W

WARRANTY			
Controls-LED-Geysair*	5 years		
Bath & turbine*	20 years		

*Some restrictions apply | www.bainultra.com/warranty



