



PRODUCT SHEET
AMMA 7048
 70" X 48" X 21"



THERMOMASSEUR® BATH	\$
THERMASSENS® BATH	\$
TUB	\$

THERMOMASSEUR (TMU)	
Jets	79
2 heated backrests (Independently controlled)	included
2 heated headrests (Independently controlled)	included
MiaPlus® Control	included
Geysair®	included
AromaCloud®	\$
Chromatherapy - 3 LED	\$

THERMASSENS (TMSU)		TUB
AromaCloud®	included	\$
Chromatherapy - 3 LED	included	\$
WarmTouchShell®	included	\$
DOT control	included	included with therapy
2 nd WarmTouchShell®	\$	\$

FEATURES			
Installation			Drop-in
No. of bathers		Inverted V	2
US gallons	75	Armrests	2
Imp. gallons	62	Grab bars (color match)	2
Raised seats	2		

OPTIONAL UPCHARGE APPLICABLE

COLOR		
Standard		
White	Biscuit	
Optional		
Black	Sandbar	Gray
		\$
CONTROL (TMU ONLY)		
MiaMulti®		\$
SKIRT		
	MULTIFIT	SJ-1
Skirt	\$	\$
Optional color	\$	\$
CLEAR ACRYLIC GRAB BARS		
With Chrome, Brass or Brushed nickel inserts		\$
DRAIN & OVERFLOW		
	16" X 35"	INTEGRATED WASTE & OVERFLOW
Chrome	\$	\$
White, Biscuit	\$	\$
Brass	\$	\$
Brushed nickel, Polished nickel	\$	\$
Oil-rubbed bronze	\$	N/A
TILE FLANGE (specify right or left)		
Ordered with bath, uninstalled		\$
Factory-installed		\$

1 800 463.2187 From 8 a.m. to 8 p.m. Monday to Thursday (EST)
 info@bainultra.com From 8 a.m. to 5 p.m. on Friday (EST)

AMMA 7048 70" X 48" X 21"

ACCESSORIES (OPTIONAL)


OTHER

Optional tile flange (specify right or left).


TOTAL PRICE

\$


DROP-IN INSTALLATION

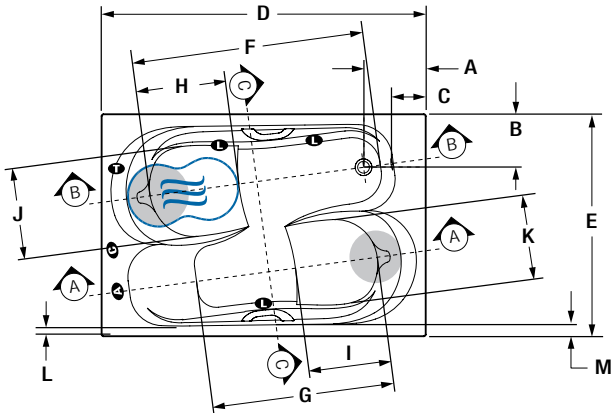


Section B

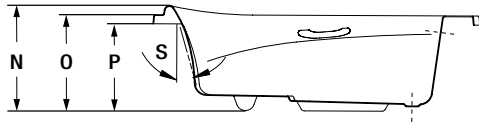

Section A



Section C



LETTER	DESCRIPTION	MEASURE
A	Outside edge to center drain	13 1/2"
B	Outside edge to center drain	11 1/2"
C	Outside edge to overflow	7 3/8"
D	Total length	69 3/4"
E	Total width	48 1/8"
F	Bathing well length	50 3/4"
G	Bathing well length	40 7/8"
H	Raised seat length	19 1/4"
I	Raised seat length	17 7/8"
J	Raised seat width	19 1/2"
K	Raised seat width	18 1/2"
L	Deck width (narrowest point)	1 7/8"
M	Deck width (widest point)	2 7/8"
N	Total height to headrest	22 1/2"
O	Height from bottom of tub to top deck	20 1/2"
P	Height from bottom of tub to bottom of lip	17 1/2"
Q	Height from drain to center of overflow	16 3/8"
R	Maximum water level	14 3/4"
S	Slope of backrest	16°
T	Slope of backrest	16°
U	Slope of backrest	41°

- Indicates turbine position (TMU)
- Indicates heated backrest (TMU)
- Indicates WarmTouchShell position (TMSU)
- Indicates LED light position
- Indicates control position when factory-installed
- Indicates AromaCloud position

TECHNICAL SPECIFICATIONS

Hot water supply required	Should be 70% of water capacity of tub or greater.
Turbine	Access to the pump must be at least 18" X 22". Standard connection is 20 A, 120 V, 60 hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 hz, dedicated line with a GFCI. Air vent necessary: 2" X 4" minimum

Approx. shipping weight	215 lbs
Turbine power	600 W
Air heater	700 W

WARRANTY

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

*Some restrictions apply | www.bainultra.com/warranty

The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0,64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.

