

THERMOMASSEUR® BATH	\$
THERMASENS® BATH	\$
тив	\$

THERMOMASSEUR (TMU)		
Jets	58	
2 heated backrests (Independently controlled)	included	
2 heated headrests (Independently controlled)	included	
MiaPlus® Control	included	
Geysair®	included	
AromaCloud®	\$	
Chromatherapy - 3 LED	\$	

THERMASENS (TMSU)				
AromaCloud®	included			
Chromatherapy - 3 LED	included			
WarmTouchShell®	included			
DOT control	included			
2 nd WarmTouchShell®	\$			

TUB	
	\$
	\$
	\$
inc	luded with therapy
	\$

FEATURES			
Installation	Drop-in or Undermount*		
No. of bathers	ŤŤ	Inverted V	2
US gallons	65	Armrests	4
Imp. gallons	54	Grab bars (color match)	2
Raised seats	2		

OPTIONAL UPCHARGE APPLICABLE				
COLOR				
Standard				
White Biscuit				
Optional		\$		
Photo Conductor Consu				
Black Sandbar Gray				
CONTROL (TMU ONLY)				
MiaMulti®	\$			
CLEAR ACRYLIC GRAB BARS				
With Chrome, Brass or Brushed nicke	l inserts	\$		
DRAIN & OVERFLOW 16" X 35" INTEGRATED WASTE & OVERFLOW				
Chrome	\$	\$		
White, Biscuit \$ \$				
Brass	\$	\$		
Brushed nickel, Polished nickel	\$	\$		
Oil-rubbed bronze	\$	N/A		
s.L.				

DON'T FORGET TO INDICATE RAISED OR FLAT DECK.

* THE AROMACLOUD IS NOT AVAILABLE WITH UNDERMOUNT INSTALLATION.



AMMA OVAL 7242 72" X 42" X 22"

ACCESSORIES (OPTIONAL)


CUTTING TEMPLATE # 90000036

	 Available with flat deck for undermounting
	or raised deck.
OTHERS	- There is a height difference for the flat de

- There is a height difference for the flat deck (see drawing Detail A).
- With or without headrest (flat).

TOTAL PRICE \$


DROP-IN/UNDERMOUNT INSTALLATION

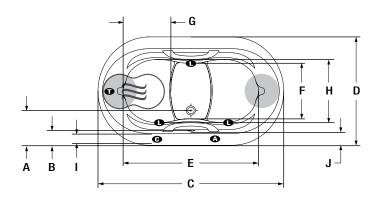

1	_		A	
	Ţ	1		1
K	L	IVI	Q	0
		<u> </u>		

LETTER	DESCRIPTION	MEASURE
A	Outside edge to center drain	13 1/2"
В	Outside edge to overflow	5 3/8"
С	Total length	72"
D	Total width	42"
E	Bathing well length	52 1/4''
F	Bathing well width at foot area	21 3/8"
G	Raised seat length	18 5/8"
Н	Raised seat width	24"
I	Flat surface width	3 7/8"
J	Deck width	5 1/4"
K	Total height to headrest	24 3/8"
L	Height from bottom of tub to top deck	22 1/8"
М	Height from bottom of tub to bottom of lip	20 1/8"
N	Height from bottom of lip to top deck	2"
0	Height from drain to center of overflow	18 1/8"
P	Maximum water level	16 3/8"
Q	Slope of backrest	18°

- Indicates turbine position (TMU)
- Indicates LED light position
- Indicates heated backrest (TMU)
- (Indicates control position when factory-installed
- Indicates AromaCloud position



Available with raised or flat deck.

TECHNICAL SPECIFICATIONS		
Hot water supply required	Should be 70% of water capacity of tub or greater.	
Turbine	Access to the pump must be at least 18" X 22". Standard connection is 20 A. 120 V, 60 hz , dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option , a second line is needed 15 A. 120 V, 60 hz , dedicated line with a GFCI. Air vent necessary: 2" X 4" minimum	

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/documentation/documentation).

The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.

Approx. shipping weight	170 lbs
Turbine power	600 W
Air heater	1 000 W

WARRANTY	
Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

*Some restrictions apply | www.bainultra.com/warranty



