



PRODUCT SHEET

AMMA OVAL 7242 (FREESTANDING NARROW BASE)

72" X 42" X 24"



| | |
|----------------------------|----|
| THERMOMASSEUR® BATH | \$ |
| THERMASENS® BATH | \$ |
| TUB | \$ |

| THERMOMASSEUR (TMU) | |
|---|----------|
| Jets | 58 |
| 2 heated backrests (Independently controlled) | included |
| 2 heated headrests (Independently controlled) | included |
| MiaPlus® Control | included |
| Geysair® | included |
| AromaCloud® | \$ |
| Chromatherapy - 3 LED | \$ |

| THERMASENS (TMSU) | | TUB |
|---------------------------------|----------|-----------------------|
| AromaCloud® | included | \$ |
| Chromatherapy - 3 LED | included | \$ |
| WarmTouchShell® | included | \$ |
| DOT control | included | included with therapy |
| 2 nd WarmTouchShell® | \$ | \$ |

| FEATURES | | | |
|----------------|----|------------------------------|---------------|
| Installation | | Freestanding | |
| No. of bathers | | Inverted V | 2 |
| US gallons | 65 | Armrests | 4 |
| Imp. gallons | 54 | Grab bars (color match) | 2 |
| Raised seats | 2 | Waste & overflow (16" x 35") | inst. & incl. |

OPTIONAL UPCHARGE APPLICABLE

COLOR
Choose the bath color
 1. Choose the bath color from standard or optional colors.
 2. Choose the base color same as bath color.
 3. Choose the exterior shell color from standard, or optional colors.

| | |
|--|----|
| Optional color - bath + exterior shell | \$ |
| Optional color for interior shell only | \$ |
| Optional color for exterior shell only | \$ |

| Standard | | \$ |
|----------|--------------|----|
| | | |
| White | Biscuit | |
| Optional | | \$ |
| | | |
| | | |
| Black | Sandbar Gray | |

| CONTROL (TMU ONLY) | |
|--------------------|----|
| MiaMulti® | \$ |

| CLEAR ACRYLIC GRAB BARS | |
|--|----|
| With Chrome, Brass or Brushed nickel inserts | \$ |

| WASTE & OVERFLOW | INTEGRATED WASTE & OVERFLOW |
|--|-----------------------------|
| White, Biscuit | \$ |
| Chrome, Brass, Brushed & Polished nickel | \$ |

DON'T FORGET TO INDICATE RAISED OR FLAT DECK. SPECIFY THE FINISH FOR THE INCLUDED DRAIN AND OVERFLOW.

1 800 463.2187
 info@bainultra.com

From 8 a.m. to 8 p.m. Monday to Thursday (EST)
 From 8 a.m. to 5 p.m. on Friday (EST)

AMMA OVAL 7242 (FREESTANDING – NARROW BASE)

72" X 42" X 24"

ACCESSORIES (OPTIONAL)

CUTTING TEMPLATE

90000059 (theatre stage, freestanding)



OTHERS

- There is a height difference for the flat deck (see drawing Detail A).
- Faucets might be installed on deck of bath on the drain & overflow side. Overflow preinstalled for easier in-home fitting.
- Specify flat or raised deck.
- The turbine must be remotely installed.



TOTAL PRICE

\$

FREESTANDING INSTALLATION

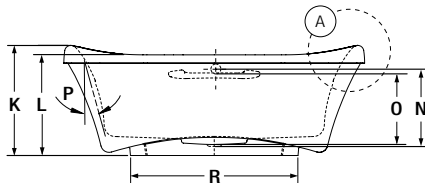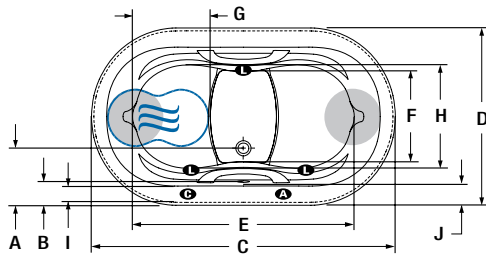

Detail A - Flat deck



| LETTER | DESCRIPTION | MEASURE |
|--------|---|---------|
| A | Outside edge to center drain | 13 1/2" |
| B | Outside edge to overflow | 5 3/8" |
| C | Total length | 72" |
| D | Total width | 42" |
| E | Bathing well length | 52 1/4" |
| F | Bathing well width at foot area | 21 3/8" |
| G | Raised seat length | 18 5/8" |
| H | Raised seat width | 24" |
| I | Flat surface width | 3 7/8" |
| J | Deck width | 5 1/4" |
| K | Height from bottom of tub to top deck | 26 3/8" |
| L | Height from bottom of tub to top deck | 24 1/8" |
| M | Height from bottom of lip to top deck | 2" |
| N | Height from drain to center of overflow | 18 1/8" |
| O | Maximum water level | 16 3/8" |
| P | Slope of backrest | 18° |
| Q | Base Width | 28 1/2" |
| R | Base Length | 40 1/8" |

L Indicates LED light position

● Indicates heated backrest (TMU)

Indicates WarmTouchShell position (TMSU)

A Indicates AromaCloud position

C Indicates control position when factory-installed (Mia or Dot)

Available with raised or flat deck.

TECHNICAL SPECIFICATIONS

Hot water supply required

Should be 70% of water capacity of tub or greater.

Turbine

Access to the pump must be at least 18" X 22". **Standard connection is 20 A, 120 V, 60 hz**, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). **For any additional option, a second line is needed 15 A, 120 V, 60 hz**, dedicated line with a GFCI. Air vent necessary: 2" X 4" minimum

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/documentation/documentation).

Approx. shipping weight

290 lbs

Turbine power

600 W

Air heater

1 000 W

WARRANTY

Controls-LED-Geysair*

5 years

Bath & turbine*

20 years

*Some restrictions apply | www.bainultra.com/warranty



The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0,64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.