



PRODUCT SHEET

CITTI 6032 WITH INSERT

60" X 32" X 20"








THERMOMASSEUR® BATH	\$
THERMASENS® BATH	\$
TUB	\$


THERMOMASSEUR (TMU)	
Jets	42
1 heated backrest	included
Mia® Control	included
Geysair®	included
AromaCloud®	\$
Chromatherapy - 2 LED	\$

THERMASENS (TMSU)		TUB
AromaCloud®	included	\$
Chromatherapy - 2 LED	included	\$
WarmTouchShell®	included	\$
DOT control	included	included with therapy

FEATURES			
Installation		Alcove (3 walls)	
No. of bathers	↓	Integrated waste & overflow	inst. & incl.
US gallons	50	Integrated skirt & tile flange (specify right or left)	inst. & incl.
Imp. gallons	42		

INTEGRATED WASTE & OVERFLOW	
Chrome, White	
Brass, Brushed Nickel, Polished Nickel	

OPTIONAL UPCHARGE APPLICABLE	
COLOR	
Standard	
 White	 Biscuit
Optional	
 Black	 Sandbar
 Gray	\$
FINISH	
UltraVelour Matte Finish (White Only)	\$
CONTROL (TMU ONLY)	
MiaMulti®	\$
MiaPlus®	\$

 TURBINE MUST BE REMOTELY INSTALLED. WITH THE AROMACLOUD AND/OR CONTROL ON THE DECK, A COMPLETE SHOWER DOOR CANNOT BE INSTALLED.
DON'T FORGET TO SPECIFY THE FINISH OF THE INTEGRATED WASTE & OVERFLOW.
 * THE MIA PLUS CONTROL IS INCLUDED WHEN PURCHASING CHROMATHERAPY ON A TMU.

1 800 463.2187 
 info@bainultra.com


From 8 a.m. to 8 p.m. Monday to Thursday (EST)
 From 8 a.m. to 5 p.m. on Friday (EST)

CITTI 6032 WITH INSERT 60" X 32" X 20"

ACCESSORIES (OPTIONAL)


OTHERS	<ul style="list-style-type: none"> - The turbine must be remotely installed. - Citti bathtubs include an integrated tile flange, specify left or right. - Insert can be installed on right or left side.
TOTAL PRICE	\$

ALCOVE INSTALLATION

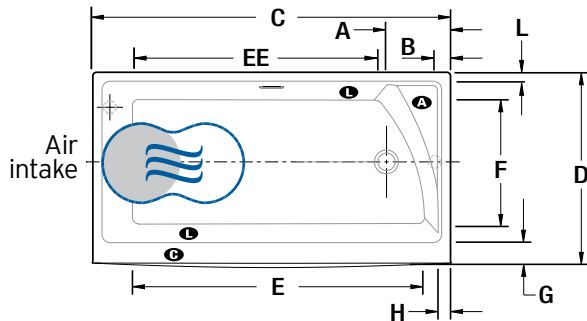

LETTER	DESCRIPTION	MEASURE
A	Outside edge to center drain	10 7/8"
B	Outside edge to centre of waste hole	2 3/4"
C	Total length	60"
D	Total width	32"
E	Bathing well length	49 1/4"
EE	Bathing well length - insert side	41 5/8"
F	Bathing well width	21 1/8"
G	Deck width	3 3/4"
H	Deck width at waste end	2"
I	Height from bottom of tub to top deck	20"
J	Height from drain to center of overflow	14 1/2"
K	Slope of backrest	17°
L	Deck width overflow side	2 1/8"

- L Indicates LED light position
- A Indicates AromaCloud position
- B Indicates heated backrest (TMU)
- G Indicates control position when factory-installed (Mia or Dot)
- G Indicates WarmTouchShell position (TMSU)

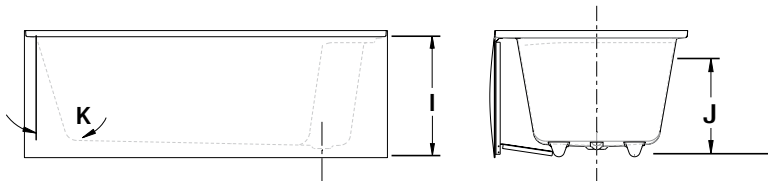

TECHNICAL SPECIFICATIONS

Hot water supply required	Should be 70% of water capacity of tub or greater.
Turbine	Access to the pump must be at least 18" X 22". Standard connection is 20 A, 120 V, 60 hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 hz, dedicated line with a GFCI. Air vent necessary: 2" X 4" minimum

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/documentation/documentation).

Approx. shipping weight	125 lbs
Turbine power	600 W
Air heater	700 W

WARRANTY

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

*Some restrictions apply | www.bainultra.com/warranty



The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0,64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.