



PRODUCT SHEET

INUA 6036

60" X 36" X 23"



Slim Deck



Standard Deck

THERMOMASSEUR® BATH	\$
THERMASENS® BATH	\$
TUB	\$

THERMOMASSEUR (TMU)	
Jets	46
1 heated backrest	included
MiaPlus® Control	included
Geysair®	included
AromaCloud®*	\$
Chromatherapy - 2 LED	\$

THERMASENS (TMSU)		TUB
AromaCloud®	included	\$
Chromatherapy - 2 LED	included	\$
WarmTouchShell®	included	\$
DOT control	included	included with therapy

FEATURES			
Installation			Drop-in
No. of bathers	↓	Inverted V	1
US gallons	54	Armrests	2
Imp. gallons	45	Grab bars (color match)	2
Raised seat	1	Comfort cushion (gray/black)	1

OPTIONAL UPCHARGE APPLICABLE

COLOR

Standard



Optional



FINISH

UltraVelour Matte Finish (White Only) \$

CONTROL (TMU ONLY)

MiaMulti® \$

CLEAR ACRYLIC GRAB BARS

With Chrome, Brass or Brushed nickel inserts \$

WASTE & OVERFLOW	16" x 35"	INTEGRATED WASTE & OVERFLOW
White	\$	\$
Biscuit	\$	\$
Chrome	\$	\$
Brass	\$	\$
Brushed & Polished nickel	\$	\$
Oil-rubbed bronze	\$	N/A

SPECIFY THE COMFORT CUSHION COLOR: WARM GRAY OR BLACK. DON'T FORGET TO SPECIFY THE DECK HEIGHT (1/2" OR 1 1/2").

1 800 463.2187 info@bainultra.com

From 8 a.m. to 8 p.m. Monday to Thursday (EST)
From 8 a.m. to 5 p.m. on Friday (EST)

BainUltra®

The quest for your wellness™

www.bainultra.com

INUA 6036 60" X 36" X 23"

TOTAL PRICE

\$



THERAPEUTIC COMFORT CUSHION - INCLUDED

Their ultras resistant urethane gel construction makes them:

- Extremely comfortable and soft to the touch
- Fully waterproof
- Remarkably durable
- Color available: Warm Gray + Black



DROP-IN INSTALLATION

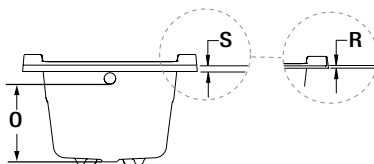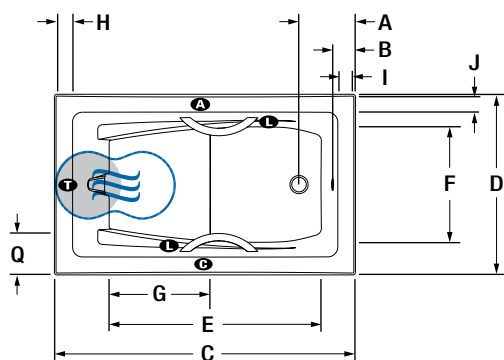

LETTER	DESCRIPTION	MEASURE
A	Outside edge to center drain	11 1/4"
B	Outside edge to overflow	4 1/2"
C	Total length	60"
D	Total width	36"
E	Bathing well length	42 1/4"
F	Bathing well width at foot area	23"
G	Raised seat length	20 1/8"
H	Deck width at backrest end	4 1/8"
I	Deck width at drain end	4 1/8"
J	Deck width	4"
K	Height from bottom of tub to top deck	23"
L	Total height to headrest	21"
M	Height from bottom of tub to bottom of lip (std. deck)	19 1/2"
M'	Height from bottom of tub to bottom of lip (slim deck)	20 1/2"
N	Height from drain to center of overflow	17 1/8"
O	Maximum water level	15 3/8"
P	Slope of backrest	24°
Q	Minimum spout reach	8"
R	Slim deck minimum height	1/2"
S	Standard deck minimum height	1 1/2"

- T** Indicates turbine position (TMU)
- L** Indicates LED light position
- Indicates heated backrest (TMU)
- Ⓢ** Indicates WarmTouchShell position (TMSU)
- ⓐ** Indicates control position when factory-installed
- Ⓐ** Indicates AromaCloud position

TECHNICAL SPECIFICATIONS

Hot water supply required	Should be 70% of water capacity of tub or greater.
Turbine	Access to the pump must be at least 18" X 22". Standard connection is 20 A. 120 V, 60 hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A. 120 V, 60 hz, dedicated line with a GFCI. Air vent necessary: 2" X 4" minimum

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/documentation/documentation).

Approx. shipping weight	137 lbs
Turbine power	600 W
Air heater	700 W

WARRANTY

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

*Some restrictions apply | www.bainultra.com/warranty



The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.