



PRODUCT SHEET

MERIDIAN 60

72" X 36" X 21"



THERMOMASSEUR® BATH	\$
THERMASENS® BATH	\$
TUB no therapy	\$

THERMOMASSEUR (TMU)	
Jets	44
1 heated backrest	included
MiaPlus® Control	included
Geysair®	included
AromaCloud®	\$
Chromatherapy - 3 LED	\$
2 nd heated backrest (advanced technology)	\$

THERMASENS (TMSU)		TUB no therapy
AromaCloud®	included	\$
Chromatherapy - 3 LED	included	\$
WarmTouchShell®	included	\$
DOT control	included	included with therapy
2 nd WarmTouchShell®	\$	\$

FEATURES			
Installation	Drop-in, Alcove (3 walls) or Undermount*		
No. of bathers	2	Imp. gallons	52
US gallons	63		

OPTIONAL UPCHARGE APPLICABLE		
COLOR		
Standard		
White	Biscuit	
Optional		
Black	Sandbar	Gray
		\$
CONTROL (TMU ONLY)		
MiaMultij®		\$
SKIRT		
	MULTIFIT	SJ-1
Skirt	\$	\$
Optional color	\$	\$
WASTE & OVERFLOW 16" X 35"		
Chrome		\$
White, Biscuit		\$
Brass		\$
Brushed nickel, Polished nickel & Oil-rubbed bronze		\$
TILE FLANGE (specify front or back)		
Ordered with bath, uninstalled		\$
Factory-installed		\$

* THE AROMACLOUD IS NOT AVAILABLE WITH UNDERMOUNT INSTALLATION. DON'T FORGET TO ORDER A TEMPLATE FOR UNDERMOUNT INSTALLATION.

1 800 463.2187 info@bainultra.com From 8 a.m. to 8 p.m. Monday to Thursday (EST)
From 8 a.m. to 5 p.m. on Friday (EST)

MERIDIAN 60 72" X 36" X 21"

ACCESSORIES (OPTIONAL)

CUTTING TEMPLATE

90000007


OTHERS

- Optional tile flange (specify front or back).
- If ordered with an installed tile flange and a back drain, the control will be shipped separately.

TOTAL PRICE

\$


ALCOVE/DROP-IN/UNDERMOUNT INSTALLATION

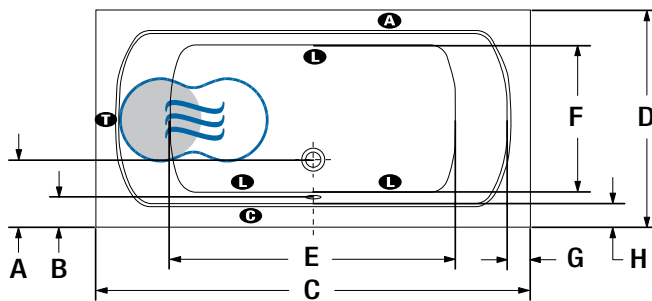

LETTER	DESCRIPTION	MEASURE
A	Outside edge to center waste	10 5/8"
B	Outside edge to overflow	4 1/4"
C	Total length	71 3/8"
D	Total width	35 3/4"
E	Bathing well length	47 1/4"
F	Bathing well width	24 1/4"
G	Deck width at backrest end	4 1/8"
H	Deck width	4"
I	Height from bottom of tub to top deck	21 1/4"
J	Height from bottom of tub to bottom of lip	19 3/4"
K	Height from waste to center of overflow	16 3/4"
L	Maximum water level	15 1/8"
M	Slope of backrest	26°

- T** Indicates turbine position (TMU)
- L** Indicates LED light position
- Indicates heated backrest (TMU)
- C** Indicates control position when factory-installed
- ☁** Indicates WarmTouchShell position (TMSU)
- A** Indicates AromaCloud position

When tiling flange is added, the AromaCloud will automatically be installed on the opposite side of the flange.

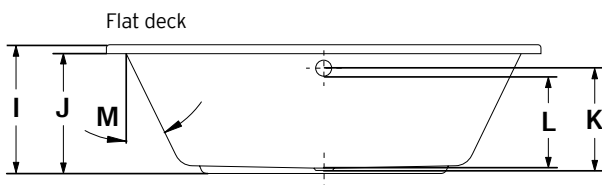

TECHNICAL SPECIFICATIONS

Hot water supply required	Should be 70% of water capacity of tub or greater.
Turbine	Access to the pump must be at least 18" X 22". Standard connection is 20 A, 120 V, 60 hz , dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 hz , dedicated line with a GFCI. Air vent necessary: 2" X 4" minimum

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/documentation/documentation).

Approx. shipping weight	136 lbs
Turbine power	600 W
Air heater	700 W

WARRANTY

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

*Some restrictions apply | www.bainultra.com/warranty



The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0,64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.