



PRODUCT SHEET
ORIGAMI 7242 DESIGN SERIES (FREESTANDING)
 72" X 42" X 23"



FREESTANDING

THERMOMASSEUR® BATH	\$
THERMASENS® BATH	\$
TUB no therapy	\$

THERMOMASSEUR (TMU)

Jets	42
1 heated backrest	included
MiaPlus® Control	included
Geysair®	included
AromaCloud®	\$
Chromatherapy - 3 LED	\$
2 nd heated backrest (advanced technology)	\$

THERMASENS (TMSU)

THERMASENS (TMSU)		TUB	
AromaCloud™	included	\$	
Chromatherapy - 3 LED	included	\$	
WarmTouchShell®	included	\$	
DOT control	included		included with therapy
2 nd WarmTouchShell	\$		\$

FEATURES

Installation	Freestanding		
No. of bathers	2	Imp. gallons	52
US gallons	63	Waste & overflow (16" x 35")	inst. & incl.

OPTIONAL UPCHARGE APPLICABLE

COLOR	
Standard	
White	Biscuit
Optional	
Sandbar	Gray
	\$
FINISH	
UltraVelour Matte Finish (White Only)*	\$
CONTROL (TMU ONLY)	
MiaMulti®	\$
INTEGRATED WASTE & OVERFLOW	
White	\$195
Biscuit	\$195
Chrome	\$195
Brass	\$195
Brushed & Polished nickel	\$195

DON'T FORGET TO SPECIFY THE FINISH OF THE WASTE & OVERFLOW.

1 800 463.2187
 info@bainultra.com

From 8 a.m. to 8 p.m. Monday to Thursday (EST)
 From 8 a.m. to 5 p.m. on Friday (EST)

ORIGAMI 7242 DESIGN SERIES (FREESTANDING) 72" X 42" X 23"

ACCESSORIES (OPTIONAL)

CUTTING TEMPLATE

90000052

OTHERS


- Faucets must be freestanding or wall-mounted.
- The turbine must be remotely installed.

TOTAL PRICE



\$

FREESTANDING INSTALLATION

Ⓐ Deck slightly modified to host the AromaCloud.

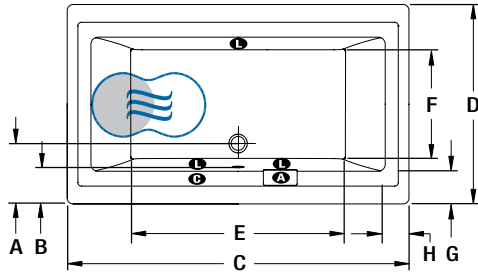

Access panel

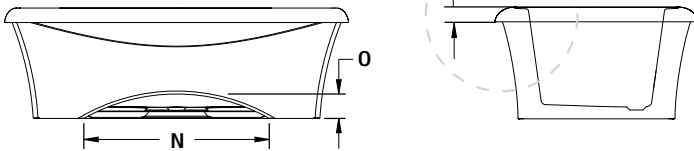

LETTER	DESCRIPTION	MEASURE
A	Outside edge to center drain	12 3/4"
B	Outside edge to overflow	7 3/8"
C	Total length	72"
D	Total width	42"
E	Bathing well length	45 3/4"
F	Bathing well width	23 3/8"
G	Deck width at drain end	6 1/2"
H	Deck width at backrest end	3 5/8"
I	Height from bottom of tub to top deck	23 1/8"
J	Height from bottom of lip to top deck	3"
K	Height from drain to center of overflow	17 1/2"
L	Maximum water level	15 3/4"
M	Slope of backrest	24°
N	Width of access panel opening	38 3/4"
O	Height of access panel opening	5 1/8"

- Ⓘ Indicates turbine position (TMU)
- Ⓛ Indicates LED light position
- Indicates heated backrest (TMU)
- Ⓒ Indicates control position when factory-installed
- ☰ Indicates WarmTouchShell position (TMSU)
- Ⓐ Indicates AromaCloud position

TECHNICAL SPECIFICATIONS

Hot water supply required Should be 70% of water capacity of tub or greater.

Turbine Access to the pump must be at least 18" X 22". **Standard connection is 20 A, 120 V, 60 hz,** dedicated line with a Ground-Fault Circuit Interrupter (GFCI). **For any additional option, a second line is needed 15 A, 120 V, 60 hz,** dedicated line with a GFCI. Air vent necessary: 2" X 4" minimum

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/documentation/documentation).

Approx. shipping weight 270 lbs

Turbine power 600 W

Air heater 700 W

WARRANTY

Controls-LED-Geysair* 5 years

Bath & turbine* 20 years

*Some restrictions apply | www.bainultra.com/warranty



The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0,64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.