AZUR 55

66" x 36" x 20"

The name Azur recalls sea and sky. It evokes a place where nature's powerful elements set the soul alight and cradle you in a comforting cocoon.



PRODUCT NO.

MODEL	тми	TUB		
	BAZLRB00T-XX	BAZLRB00N-XX		

THERMOMASSEUR (TMU) Hydro-thermo massage • Air jet system	\$
Jets	40
1 heated backrest	Included
Mia® Control	Included
BU-Touch Control Application BUTOUCH	\$
Geysair®	Included
AromaCloud®* BAROMAC	\$
Illuzio Chromatherapy BCHRO6	\$

TUB Soaker	\$
AromaCloud®* BAROMAC	\$
Illuzio Chromatherapy BCHRO6	\$
WarmTouchShell® BWTS	\$
DOT control	Included with therapy

FEATURES				
Installation type		Drop-in & Alcove (3 walls)		
No. of bathers	•	Armrests		2
US gallons	50	Grab bars (color match)		2
Imp. gallons	41			
STANDARD COLOR				
White 01 Biscuit 02				Included


OPTIONS (UPCHARGE APPLICABLE)		
SKIRT	MULTIFIT BSMUL-XX	SJ-1 BSJ1-XX
White 01, Biscuit 02	\$	\$
WASTE & OVERFLOW 16" x 35" BOVER16-XX		
Chrome 07		\$
White 01, Biscuit 02		\$
Brushed Nickel 09, Polished Nickel 10, Oil-rubbed	Bronze 11	\$
CLEAR ACRYLIC GRAB BARS BGBG10-XX		
With Chrome 07 or Brushed Nickel 09 inserts		\$
TILE FLANGE (specify right or left)		
Ordered with bath (not installed) BTILEN		\$
Factory-installed. Right BTILER, Left BTILEL, Special installation BTILEO		\$
CONTROL (TMU only)		
MiaPlus®** BMIAP2-XX		\$
IF REQUIRED BY CONSTRUCTION CODE		
16" x 35" Cable driven brass waste & overflow kit	BOVERBR-XX	\$



- * The AromaCloud® is built into the deck (factory installed).

 ** The MiaPlus® Control is included when purchasing Chromatherapy on a TMU.


TOTAL PRICE

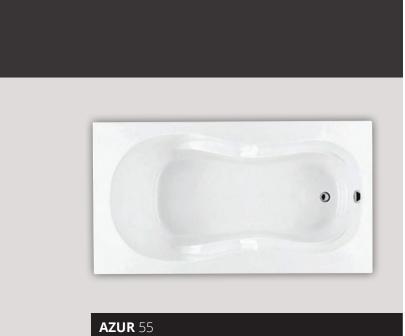





INSTALLATION

When tile flange is added, the AromaCloud® will automatically
 be installed on the appearity side of the flange.








LETTER	DESCRIPTION	MEASURE
Α	Outside edge to center drain	8"
В	Outside edge to overflow	2 5/8"
С	Total length	65 7/8"
D	Total width	36"
E	Bathing well length	51 1/4"
F	Bathing well width at seat area	22 7/8"
G	Bathing well width at center zone	21 3/4"
Н	Bathing well width (narrowest point)	18 1/2"
I	Deck width (narrowest point)	3"
J	Deck width (widest point)	5 5/8"
K	Deck width at drain end	2 1/2"
L	Height from bottom of bath to top deck	20 1/4"
М	Height from bottom of bath to bottom of deck	18 3/4"
N	Height from drain to center of overflow	16 3/8"
0	Maximum water level	14 5/8"
P	Slope of backrest	24°

- ⚠ AromaCloud® position
- **ⓒ** Control position when factory-installed (Mia® or DOT)
- Turbine position (TMU)
- Indicates heated backrest (TMU)
- Indicates WarmTouchShell® position (TUB)

TECHNICAL SE	PECIFICATIONS		
Hot water supply required	Should be 70% of water capacity of TUB or greater.	Τ	Approx. shipping weight
supply loquilou	Access to the pump must be at least 18" x 22". Standard connection is 20 A. 120 V, 60 hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A. 120 V, 60 hz, dedicated line with a GFCI. Air vent necessary. 2" x 4" minimum. Others - The GEYSAIR must always be accessible and connected to the hot water supply (provide access) Optional tile flange (specify right or left).		Turbine power
Turbine			Air heater
			WARRANTY
Others			Controls-LED-Geysair*
Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/documentation/documentation).			Bath & turbine*
			46







The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.

135 lbs 550 W 600 W

5 years 20 years