

beone 4639

Freestanding
46" x 39" x 30"



Product No.

Model Freestanding TMU BBODOF00T-XX Soaker BBODOF00N-XX

ThermoMasseur (TMU)

Air Jet System	\$9,360
Jets	40
1 heated backrest	Included
MiaPlus® Control*	Included
BU-Touch Control Application <i>BUTOUCH</i>	Included
Geysair®	Included
Illuzio Chromatherapy <i>BCHRO6</i>	\$995

Soaker

	\$7,280
Illuzio Chromatherapy <i>BCHRO6</i>	\$995
WarmTouchShell® <i>BWTS</i>	\$1,125
DOT Control	Included with therapy

Features

Installation Type	Freestanding
No. of bathers 1 Imp. gallons 44 US gallons 53 Raised seat 1	
Integrated Drain & Overflow — with Trim <i>BOVERINI-01</i>	
<input type="radio"/> White 01	Installed & Included
Standard Bath Color <i>p.17</i>	
<input type="radio"/> White 01	Included

Options UPCHARGE APPLICABLE

Bath Color <i>p.17</i>	
<input checked="" type="radio"/> Black / White 66	\$475
Finish <i>p.17</i>	
<input type="radio"/> UltraVelour Matte Finish (white only) <i>BVEL2</i>	\$850
Drain & Overflow <i>p.14</i>	Integrated with trim <i>BOVERIN-XX</i>
<input type="radio"/> White 01 <input type="radio"/> Chrome 07	Incl.
<input type="radio"/> Brushed Nickel 09	Incl.
<input type="radio"/> Polished Nickel 10	Incl.
<input checked="" type="radio"/> Matte Black 19 <input type="radio"/> Satin Brass 18	\$125
Island Tub Drain™*** <i>p.15</i>	
Island Tub Drain™ <i>BISLDD</i>	\$260
Cast Iron Island Tub Drain™ <i>BISLDDCI</i>	\$310
If Required by Construction Code	
Brass drain & overflow kit <i>BDRCOB</i>	\$240
Brass drain kit <i>BDRCB</i>	\$60


⚠ Don't forget to specify the finish of the Integrated drain & overflow.

* Control must be wall-mounted. Faucets must be freestanding or wall-mounted.
*** An Island Tub Drain™ is required when there is no access under the bath, and turbine is installed under the bath.




beone 4639

Freestanding
46" x 39" x 30"

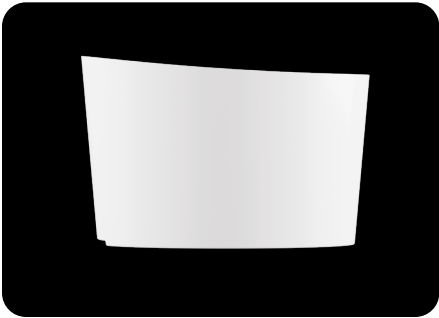

Technical Specifications

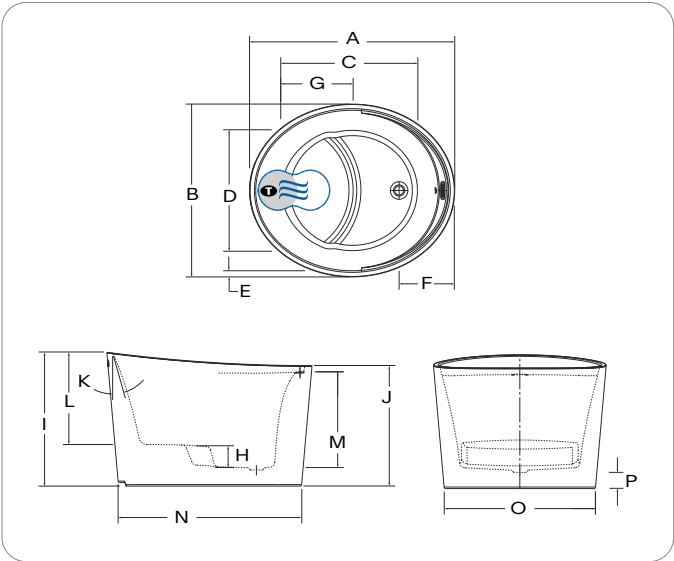

Letter	Description	Measure
A	Total length	46"
B	Total width	38 3/4"
C	Bathing well length	30 3/4"
D	Bathing well width	27 1/4"
E	Deck width	1 3/8"
F	Outer edge to center of drain	12 3/8"
G	Depth of seat	16 1/4"
H	Height of seat	5 3/8"
I	Total height at headrest	30"
J	Total height at overflow	27"
K	Slope of backrest	16°
L	Top to seat height	20 5/8"
M	Maximum water level	21 1/2"
N	Base length	41 1/8"
O	Base width	33 7/8"
P	Height from drain to floor	3 5/8"

● Indicates heated backrest (TMU) ⊞ Indicates WarmTouchShell® position (Soaker)
ⓘ Turbine position (TMU)

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.
Turbine	Turbine is factory installed, so access to the pump must be at least 18" x 22". Standard connection is 20 A, 120 V, 60 Hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 Hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.
Others	The Geysair® is located on the same side as the heated backrest. It must not be relocated. It must be connected to the hot water supply and be accessible (provide access). Faucet must be freestanding or wall-mounted. The turbine can be remotely installed. Controls cannot be installed on the deck of the bath.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/dealers/dealer-documentation-and-catalog).

Cutting template	# 90000083
Approx. shipping weight	240 lb
Turbine power	550 W
Air heater	600 W

Warranty

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

* Some restrictions apply | www.bainultra.com/warranty

Dimensions are subject to change; measured at external edges. Bathing well measured at air jet level. Tolerance: ±0.25" (±0.64 cm). Ensure bathtub is received prior to any construction. BainUltra® is not responsible for any preparatory work done before product arrival.