

# BEONE 4639

46" x 39" x 30" (FREESTANDING)

The first of its kind, a Japanese style bathtub, BeOne provides an extraordinarily unique bathing experience. The air jets coupled with its circular design create a powerful massage that is unlike any other offered by traditional Air System.



## PRODUCT NO.

MODEL	TMU	TUB
Freestanding	BBODOF00T-XX	BBODOF00N-XX

THERMOMASSEUR (TMU) Hydro-thermo massage • Air jet system	\$
Jets	40
1 heated backrest	Included
MiaPlus® Control* (not installed)	Included
BU-Touch Control Application	Included
Geysair®	Included
AromaCloud®	N/A
Illuzio Chromatherapy <a href="#">BCHRO6</a>	\$

TUB Soaker	\$
Illuzio Chromatherapy <a href="#">BCHRO6</a>	\$
WarmTouchShell® <a href="#">BWTS</a>	\$
DOT control	Included with therapy

## FEATURES

Installation type	Freestanding		
No. of bathers		Imp. gallons	44
US gallons	53	Raised seat	1

## INTEGRATED WASTE & OVERFLOW [BOVERINI-XX](#)

White <a href="#">01</a> , Chrome <a href="#">07</a> , Brushed Nickel <a href="#">09</a> , Polished Nickel <a href="#">10</a>	Installed & Included
---	----------------------

## STANDARD COLOR

	Included
White <a href="#">01</a>	

## OPTIONS (UPCHARGE APPLICABLE)

### COLOR

	\$
Black / White <a href="#">66</a>	

### FINISH

UltraVelour Matte Finish (white only) <a href="#">BVEL</a>	\$
--	----

### INTEGRATED WASTE & OVERFLOW [BOVERINI-XX](#)

Matte Black <a href="#">19</a> , Satin Brass <a href="#">18</a>	\$
---	----

### ISLAND TUB DRAIN™\*\*

Island Tub Drain™ <a href="#">BISLDD</a>	\$
Cast Iron Island Tub Drain™ <a href="#">BISLDDCI</a>	\$

### IF REQUIRED BY CONSTRUCTION CODE OR INSTALLED WITH ITD

Brass waste & overflow kit <a href="#">BDRCOB</a>	\$
Brass waste kit <a href="#">BDRCB</a>	\$



Don't forget to specify the **finish of the integrated waste & overflow.**

\* Control must be wall-mounted. Faucets must be freestanding or wall-mounted.

\*\* An Island Tub Drain™ is required when there is **no access under the bath**, and turbine is installed under the bath.


<b>TOTAL PRICE</b>	\$
--------------------	----



**BEONE 4639 (FREESTANDING)**



**INSTALLATION**

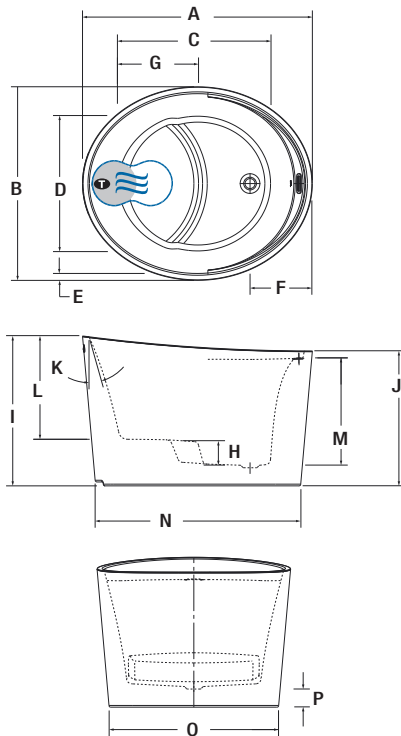

LETTER	DESCRIPTION	MEASURE
A	Total length	46"
B	Total width	38 3/4"
C	Bathing well length	30 3/4"
D	Bathing well width	27 1/4"
E	Deck width	1 3/8"
F	Outer edge to center of waste	12 3/8"
G	Depth of seat	16 1/4"
H	Height of seat	5 3/16"
I	Total height at headrest	30"
J	Total height at overflow	27"
K	Slope of backrest	16°
L	Top to seat height	20 5/8"
M	Maximum water level	21 1/2"
N	Base length	41 1/8"
O	Base width	33 7/8"
P	Height from drain to floor	3 5/8"

- Indicates heated backrest (TMU)
- ☞ Indicates WarmTouchShell® position (TUB)
- ⓘ Turbine position (TMU)

**TECHNICAL SPECIFICATIONS**

<b>Hot water supply required</b>	The hot water supply should be 70% or more of the bath's total water capacity.
<b>Turbine</b>	Turbine is factory installed, so access to the pump must be at least 18" x 22". <b>Standard connection is 20 A, 120 V, 60 Hz</b> , dedicated line with a Ground-Fault Circuit Interrupter (GFCI). <b>For any additional option, a second line is needed 15 A, 120 V, 60 Hz</b> , dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.
<b>Others</b>	<ul style="list-style-type: none"> <li>- The Geysair is located on the same side as the heated backrest. It must <b>NOT</b> be relocated. It must be <b>connected to the hot water supply</b> and be accessible (provide access).</li> <li>- Faucet must be freestanding or wall-mounted.</li> <li>- The turbine can be <b>remotely installed</b>.</li> <li>- Controls cannot be installed on the deck of the bath.</li> </ul>

<b>Cutting template</b>	# 90000083
<b>Approx. shipping weight</b>	240 lbs
<b>Turbine power</b>	550 W
<b>Air heater</b>	600 W
<b>WARRANTY</b>	
Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations ([www.bainultra.com/documentation/documentation](http://www.bainultra.com/documentation/documentation)).

\* Some restrictions apply | [www.bainultra.com/warranty](http://www.bainultra.com/warranty)

The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.