

# charism oval 6436

Freestanding  
64" x 36" x 24"



Black deck color

## Product No.

Model Freestanding TMU BCH3OF00T-XX Soaker BCH3OF00N-XX

## ThermoMasseur (TMU)

Air Jet System

Jets	35
1 heated backrest	Included
MiaPlus® Control*	Included
BU-Touch Control Application BUTOUCH	Included
Geysair®	Included
Illuzio Chromatherapy BCHRO6	\$995
2nd heated backrest (WTS-1 zone) BSHB	\$1,125

\$11,000

## Soaker

Illuzio Chromatherapy BCHRO6	\$995
WarmTouchShell® BWTS	\$1,125
DOT Control	Included with therapy
2nd WarmTouchShell® BWTS2	\$370

\$8,525

## Features

Installation Type	Freestanding
No. of bathers 2 1/2 Imp. gallons 42 US gallons 51	
Integrated Drain & Overflow — ZenFlow† BOVERINIZF-01	
White 01	Installed & Included
Standard Bath Color p.17	
White 01	Included
Standard Deck Color BDECKCO-01 p.17	
White 01	Included

## Options UPCHARGE APPLICABLE

Finish p.17		
UltraVelour Matte Finish (white only) BVEL2		\$850
Deck Color BDECKCO-XX p.17		
Black 06 Copper 13 Crystal Rock 17		\$250
Universal Armrests BGBGU-XX p.16		
White 01		\$895
Bath Pillow BPILLOW p.252		\$240
Drain & Overflow p.14		
White 01		Incl. \$40
Matte White 32 Chrome 07		\$40 \$70
Brushed Nickel 09 Polished Nickel 10		
Matte Black 19 Satin Brass 18		\$95 \$125
Island Tub Drain™*** p.17		
Island Tub Drain™ BISLDD		\$260
Cast Iron Island Tub Drain™ ISLDDCI		\$310
If Required by Construction Code		
Brass drain & overflow kit BDRCOB		\$240
Brass drain kit BDRCB		\$60


⚠ Don't forget that this model is available in White only with choice of deck color.

† ZenFlow: Integrated overflow without a trim.  
\* For TMU, control and faucets cannot be installed on deck of the bath.  
\*\*\* An Island Tub Drain™ is required when there is no access under the bath.




# charism oval 6436

Freestanding  
64" x 36" x 24"

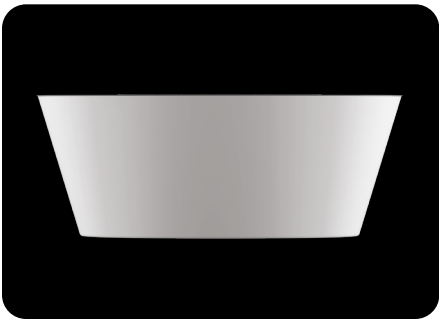

## Technical Specifications

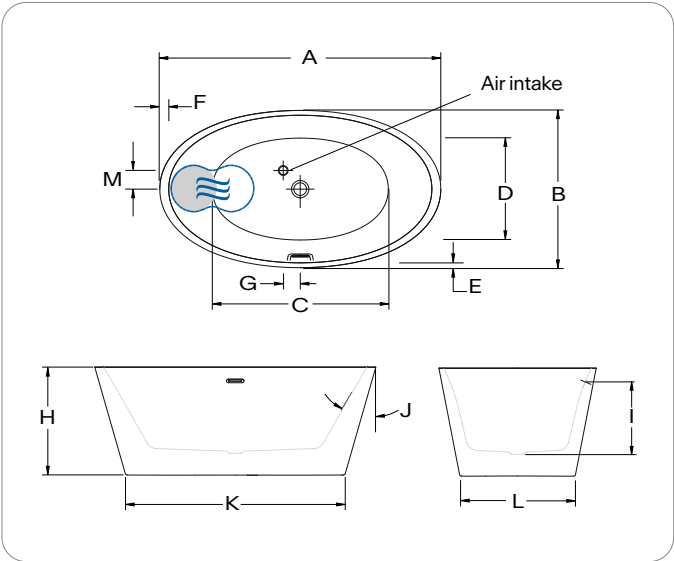

Letter	Description	Measure
A	Total length	64 1/8"
B	Total width	35 7/8"
C	Bathing well length	41 3/4"
D	Bathing well width	23 5/8"
E	Deck width	1 1/8"
F	Deck width at headrest	2"
G	Center drain to center air intake	3 7/8"
H	Total height	24 3/4"
I	Maximum water level	15 7/8"
J	Slope of backrest	31°
K	Base length	50"
L	Base width	26 1/4"
M	Center drain to center air intake	4 1/4"

● Indicates heated backrest (TMU)    ⊗ Indicates WarmTouchShell® position (Soaker)

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.
Turbine	Access to the pump must be at least 18" x 22". Standard connection is 20 A, 120 V, 60 Hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 Hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.
Others	The Geysair® is located on the same side as the heated backrest. It must not be relocated. It must be connected to the hot water supply and be accessible (provide access). Faucet must be freestanding or wall-mounted. The turbine must be remotely installed. Controls cannot be installed on the bath.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations ([www.bainultra.com/dealers/dealer-documentation-and-catalog](http://www.bainultra.com/dealers/dealer-documentation-and-catalog)).

Cutting template	# 90000067
Approx. shipping weight	230 lb
Turbine power	550 W
Air heater	600 W

## Warranty

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

\* Some restrictions apply | [www.bainultra.com/warranty](http://www.bainultra.com/warranty)

Dimensions are subject to change; measured at external edges. Bathing well measured at air jet level. Tolerance: ±0.25" (±0.64 cm). Ensure bathtub is received prior to any construction. BainUltra® is not responsible for any preparatory work done before product arrival.