

citti 6032 With Insert

60" x 32" x 20"



Product No.

Model Left	TMU BCIDRAJLT-XX	Soaker BCIDRAJLN-XX
Model Right	TMU BCIDRAJRT-XX	Soaker BCIDRAJRN-XX

ThermoMasseur (TMU)

Air Jet System	\$4,935
Jets	42
1 heated backrest	Included
Mia® Control	Included
BU-Touch Control Application <i>BUTOUCH</i>	\$495
Geysair®	Included
AromaCloud® <i>BAROMAC</i>	\$590
Illuzio Chromatherapy <i>BCHRO6</i>	\$995

Soaker

AromaCloud® <i>BAROMAC</i>	\$590
Illuzio Chromatherapy <i>BCHRO6</i>	\$995
WarmTouchShell® <i>BWTS</i>	\$1,125
DOT Control	Included with therapy

Features

Installation Type	Alcove (3 walls)
Integrated Skirt & Tile Flange (specify right or left)	Installed & Included
No. of bathers ½ Imp. gallons 42 US gallons 50	
Integrated Drain & Overflow — ZenFlow† <i>BOVERINIZF-XX</i>	
○ White 01 ○ Biscuit 02	Installed & Included
Standard Bath Color p.17	
○ White 01 ○ Biscuit 02	Included

Options UPCHARGE APPLICABLE

Finish p.17		
○ UltraVelour Matte Finish (white only) <i>BVEL1</i>	\$650	
Control (TMU only) p.13		
MiaPlus®# <i>BMIAP2-XX</i>	\$285	
Universal Armrests <i>BGBGU-XX</i> p.16		
○ White 01	\$895	
Bath Pillow <i>BPILOW</i> p.252	\$240	
Drain & Overflow p.14		
○ Chrome 07	\$40	\$70
○ White 01 ○ Biscuit 02	Incl.	\$40
○ Brushed Nickel 09	\$40	\$70
○ Polished Nickel 10	\$40	\$70
● Matte Black 19 ● Satin Brass 18	\$95	\$125
○ Matte White 32	\$40	\$70
If Required by Construction Code		
Brass drain & overflow kit <i>BDRCOB</i>	\$240	
Brass drain kit <i>BDRCB</i>	\$60	

- † Turbine must be remotely installed. With the AromaCloud® and/or Control on the deck, a complete shower door cannot be installed.
- Faucets must be wall-mounted. Don't forget to specify the finish of the Integrated drain & overflow.

† ZenFlow: Integrated overflow without a trim.
The MiaPlus® Control is included when purchasing Chromatherapy on a TMU.

citti 6032 With Insert


60" x 32" x 20"



The insert is positioned on the side of the drain (left or right)



Technical Specifications

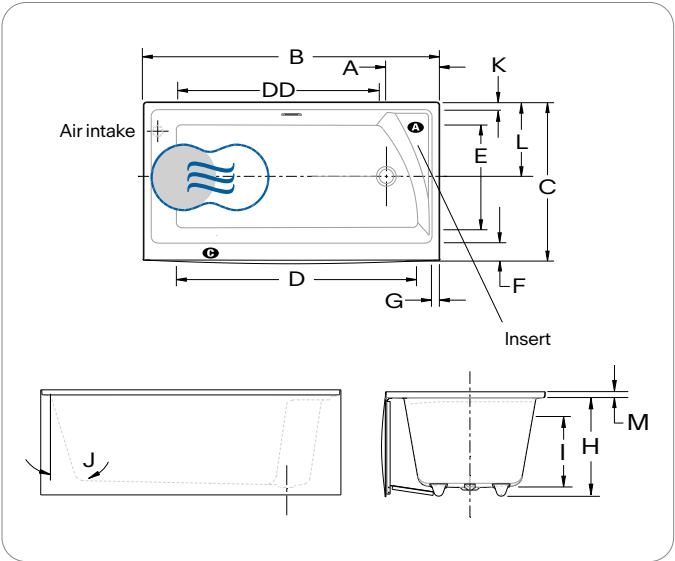

Letter	Description	Measure
A	Outside edge to center drain	10 1/8"
B	Total length	60"
C	Total width	32"
D	Bathing well length	49 1/4"
DD	Bathing well length - insert side	42 5/8"
E	Bathing well width	21 1/8"
F	Deck width (skirt side)	3 3/4"
G	Deck width at drain end	2 1/8"
H	Height from bottom of bath to top deck	20"
I	Maximum water level	14 1/2"
J	Slope of backrest	17°
K	Deck width overflow side	2 1/8"
L	Outside edge to center drain	15 1/8"
M	Tile flange height	1"

● A AromaCloud® position ● DD Control position when factory-installed (Mia® or DOT)
● Indicates heated backrest (TMU) ☒ Indicates WarmTouchShell® position (Soaker)

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.
Turbine	Access to the pump must be at least 18" x 22". Standard connection is 20 A. 120 V, 60 Hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A. 120 V, 60 Hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.
Others	The Geysair® is located on the same side as the heated backrest. It must not be relocated. It must be connected to the hot water supply and be accessible (provide access). The turbine must be remotely installed. Citti bathtubs include an integrated tile flange, specify right or left. Insert can be installed on right or left side.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/dealers/dealer-documentation-and-catalog).

Approx. shipping weight	125 lb
Turbine power	550 W
Air heater	600 W

Warranty

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

* Some restrictions apply | www.bainultra.com/warranty

Dimensions are subject to change; measured at external edges. Bathing well measured at air jet level. Tolerance: ±0.25" (±0.64 cm). Ensure bathtub is received prior to any construction. BainUltra® is not responsible for any preparatory work done before product arrival.