meridian 55



Product No.

Model

TMU BMELRIOOT-XX Soaker BMELRIOON-XX

Options UPCHARGE APPLICABLE

ThermoMasseur (TMU) Air Jet System	\$5,490	
Jets	42	
1 heated backrest	Included	
MiaPlus® Control	Included	
BU-Touch Control Application BUTOUCH	\$495	
Geysair®	Included	
AromaCloud®** BAROMAC	\$590	
Illuzio Chromatherapy BCHRO6	\$995	
2nd heated backrest (WTS-1 zone) BSHB	\$1,125	

Soaker	\$2,775
AromaCloud®** BAROMAC	\$590
Illuzio Chromatherapy BCHRO6	\$995
WarmTouchShell® BWTS	\$1,125
DOT Control	Included with therapy
2nd WarmTouchShell® BWTS2	\$370

Skirt p.254	Multifit BSMUL-XX	SJ-1 <i>BSJ1-XX</i>
White 01 Biscuit 02	\$695	\$715
Tile Flange (specify right or left) p.15		
Ordered with bath (not installed) BTILEN	\$79	
Factory-installed. Front <i>BTILEF</i> , Back <i>BTILEB</i> , Special installation <i>BTILEO</i>	\$155	
Bath Pillow BPILLOW p.252	\$240	
Comfort Cushion BCUSHIONA p.253	\$540	
Grey 05 🗢 Black 02		
Drain & Overflow p.14	Integrated ZenFlow [†] BOVERINZF-XX	16" × 35" BOVER16-XX
Chrome 07	\$205	\$260
White 01 Biscuit 02	\$165	\$290
Brushed Nickel 09	\$205	\$290
Polished Nickel 10	\$205	\$290
Oil-rubbed Bronze 11	N/A	\$400
Matte Black 19 Satin Brass 18	\$260	N/A
If Required by Construction Code		

16" x 35" Cable driven brass drain & overflow kit BOVERBR \$240

Features

Installation Type	Drop-in & Alcove (3 walls)
No. of bathers 👬 Imp. gallons 39 US gallons 47	
Standard Bath Color p.17	
White 01 Biscuit 02	Included

ZenFlow: Integrated overflow without a trim. The AromaCloud[®] is built into the deck (factory installed). t


**



Product Sheet


meridian 55

66"×36"×20"

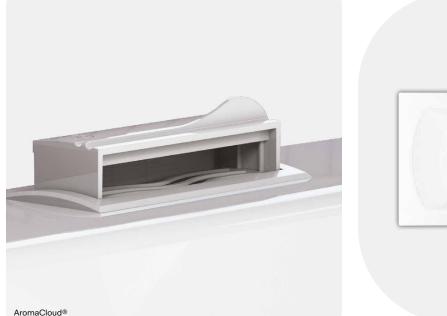



Technical Specifications



Letter	Description	Measure
A	Outside edge to center drain	11 3⁄8"
В	Outside edge to overflow	4 1⁄4"
С	Total length	65 1/2"
D	Total width	35 3⁄4"
E	Bathing well length	46 1/8"
F	Bathing well width	23 ¼"
G	Deck width at backrest end	4 3⁄8"
н	Deck width	4"
I	Height from bottom of bath to top deck	20 ¼"
J	Height from bottom of bath to bottom of deck	18 ¾"
К	Height from bottom of drain to center of overflow	16 1⁄8"
L	Maximum water level (Drain & overflow 16" x 35")	14 3⁄8"
М	Slope of backrest	24°
N	Slope of backrest	15°
Arom	aCloud® position. When the tile flange is added, the	AromaCloud®

AromaCloud® position. When the tile flange is added, the AromaCloud® will automatically be installed on the opposite side of the flange.
Control position when factory-installed (Mia® or DOT) • Turbine position (TMU)
Indicates heated backrest (TMU) (
Indicates WarmTouchShell® position (Soaker)

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.
Turbine	Access to the pump must be at least 18" x 22". Standard connection is 20 A. 120 V, 60 Hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A. 120 V, 60 Hz, dedicated line with a GFCI. Air vent necessary: 2° x 4" minimum.
Others	The Geysair® is located on the same side as the heated backrest. It must not be relocated It must be connected to the hot water supply and be accessible (provide access).
	Optional tile flange (specify front or back). When ordered with a factory-installed tile flange the control will not be installed on the bath.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/dealers/dealer-documentation-and-catalog).

Cutting template	# 9000007	
Approx. shipping weight	127 lb	
Turbine power	550 W	
Air heater	600 W	

Warranty

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

* Some restrictions apply | www.bainultra.com/warranty

Dimensions are subject to change; measured at external edges. Bathing well measured at air jet level. Tolerance: ±0.25" (±0.64 cm). Ensure bathtub is received prior to any construction. BainUltra® is not responsible for any preparatory work done before product arrival.