

meridian 6030

60" x 30" x 21"



Product No.

Model Alcove, Right	TMU BMEBRIORT-XX	Soaker BMEBRIORN-XX
Model Alcove, Left	TMU BMEBRIOLT-XX	Soaker BMEBRIOLN-XX
Model Drop-in	TMU BMEBRIOOT-XX	Soaker BMEBRIOON-XX

ThermoMasseur (TMU)

Air Jet System	\$4,265
Jets	37
1 heated backrest	Included
MiaPlus® Control	Included
BU-Touch Control Application <i>BUTOUCH</i>	\$495
Geysair®	Included
AromaCloud®** <i>BAROMAC</i>	\$590
Illuzio Chromatherapy <i>BCHRO6</i>	\$950
2nd heated backrest (WTS-1 zone) <i>BSHB</i>	\$995

Soaker

AromaCloud®** <i>BAROMAC</i>	\$590
Illuzio Chromatherapy <i>BCHRO6</i>	\$995
WarmTouchShell® <i>BWTS</i>	\$1,125
DOT Control	Included with therapy

Features

Installation Type	Drop-in, Undermount & Alcove (3 walls)
No. of bathers Imp. gallons 41 US gallons 50	
Integrated Tile Flange (specify right or left)	Included
Standard Bath Color	
☐ White 01 ☐ Biscuit 02	Included


Options UPCHARGE APPLICABLE

Skirt	<i>BSMUL-XX</i>	Multifit <i>BSJI-XX</i>	SJ-1
☐ White 01 ☐ Biscuit 02		\$695	\$715
Bath Pillow <i>BPILLOW</i>		\$240	
Comfort Cushion <i>BCUSHIONA</i>		\$540	
☐ Grey 05 ☐ Black 02			
Drain & Overflow		Integrated ZenFlow [†] <i>BOVERINZF-XX</i>	16" x 35" <i>BOVER16-XX</i>
☐ Chrome 07		\$205	\$260
☐ White 01 ☐ Biscuit 02		\$165	\$290
☐ Brushed Nickel 09		\$205	\$290
☐ Polished Nickel 10		\$205	\$290
☐ Oil-rubbed Bronze 11		N/A	\$400
☐ Matte Black 19 ☐ Satin Brass 18		\$260	N/A
If Required by Construction Code			
16" x 35" Cable driven brass drain & overflow kit <i>BOVERBR</i>		\$240	
Brass drain & overflow kit [‡] <i>BDRCOB</i>		\$240	
Brass drain kit [‡] <i>BDRCB</i>		\$60	

[†] ZenFlow: Integrated overflow without a trim.
[‡] When ordered with Integrated drain & overflow.
^{**} The AromaCloud® is built into the deck (factory installed).
Not available for undermount installation.


meridian 6030

60" x 30" x 21"

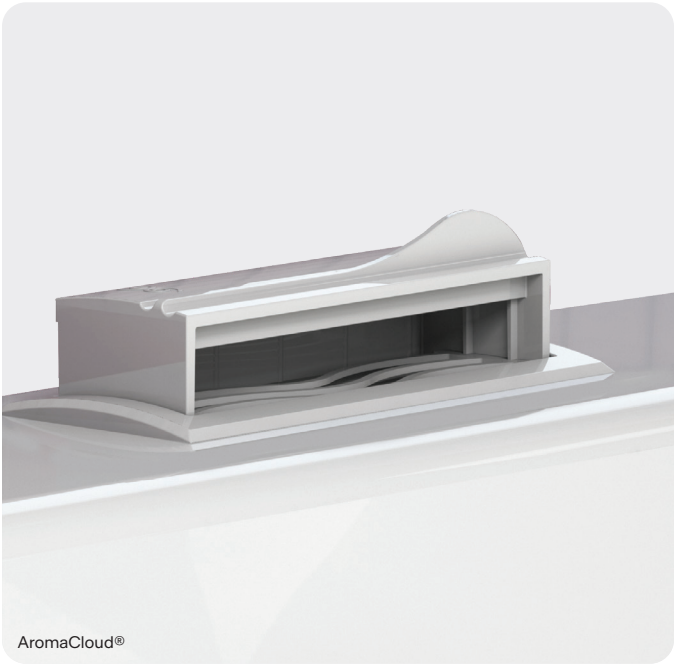

Technical Specifications

- A** Deck modified to host the AromaCloud®. When tile flange is added, the AromaCloud® will automatically be installed on the opposite side of the flange.

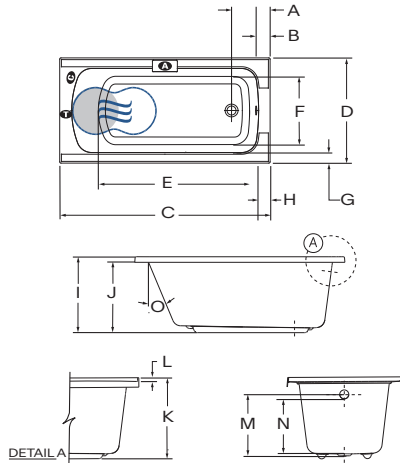

Letter	Description	Measure
A	Outside edge to center drain	11"
B	Outside edge to overflow	4"
C	Total length	60"
D	Total width	30"
E	Bathing well length	43 5/8"
F	Bathing well width	19 5/8"
G	Deck width	3 1/4"
H	Deck width at drain end	3 1/2"
I	Height from bottom of bath to top deck	20 1/2"
J	Height from bottom of bath to bottom of deck	19"
K	Height from bottom of bath to top of tile flange	21 1/2"
L	Tile flange height	1"
M	Height from bottom of drain to center of overflow	15 13/16"
N	Maximum water level (Drain & overflow 16" x 35")	14 1/6"
O	Slope of backrest	24°

- A** AromaCloud® position. When the tile flange is added, the AromaCloud® will automatically be installed on the opposite side of the flange.
C Control position when factory-installed (Mia® or DOT) **T** Turbine position (TMU)
● Indicates heated backrest (TMU) ☉ Indicates WarmTouchShell® position (Soaker)

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.
Turbine	Access to the pump must be at least 18" x 22". Standard connection is 20 A, 120 V, 60 Hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 Hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.
Others	The Geysair® is located on the same side as the heated backrest. It must not be relocated. It must be connected to the hot water supply and be accessible (provide access). There is a height difference for the integrated tile flange (see Detail A). Available with or without integrated Tile Flange (specify right or left) at the same price.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/dealers/dealer-documentation-and-catalog).

Cutting template	# 90000053
Approx. shipping weight	100 lb
Turbine power	550 W
Air heater	600 W

Warranty

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

* Some restrictions apply | www.bainultra.com/warranty

Dimensions are subject to change; measured at external edges. Bathing well measured at air jet level. Tolerance: ±0.25" (±0.64 cm). Ensure bathtub is received prior to any construction. BainUltra® is not responsible for any preparatory work done before product arrival.