

# thalassa sensation

54" x 54" x 20"



## Product No.

Model	TMU BTHACD00T-XX	Soaker BTHACD00N-XX
-------	------------------	---------------------

## ThermoMasseur (TMU)

Air Jet System	\$5,100
Jets	40
1 heated backrest & headrest	Included
Mia® Control	Included
BU-Touch Control Application <i>BUTOUCH</i>	\$495
Geysair®	Included
AromaCloud®** <i>BAROMAC</i>	\$590
Illuzio Chromatherapy <i>BCHRO6</i>	\$995
2nd heated backrest (WTS-1 zone) <i>BSHB</i>	\$1,125

## Soaker

AromaCloud®** <i>BAROMAC</i>	\$590
Illuzio Chromatherapy <i>BCHRO6</i>	\$995
WarmTouchShell® <i>BWTS</i>	\$1,125
DOT Control	Included with therapy
2nd WarmTouchShell® <i>BWTS2</i>	\$370

## Features

Installation Type	Drop-in & Corner
No. of bathers ♀♂ Imp. gallons 46 US gallons 55 Grab bars (color match) 1	
Standard Bath Color <i>p.17</i>	
<input type="radio"/> White 01 <input type="radio"/> Biscuit 02	Included

## Options UPCHARGE APPLICABLE

Control (TMU only) <i>p.13</i>	
MiaPlus®# <i>BMIAP1-XX</i>	\$285
Skirt SJ-3 SE <i>BSJ3-XX p.254</i>	
<input type="radio"/> White 01 <input type="radio"/> Biscuit 02	\$1,310
Clear Acrylic Grab Bars <i>BGBG10-XX p.16</i>	
<input type="radio"/> Chrome 07 or <input type="radio"/> Brushed Nickel 09 inserts	\$60
Tile Flange <i>p.15</i>	
Ordered with bath (not installed) <i>BTILEN</i>	\$79
Factory-installed. Front <i>BTILEF</i> . Special installation <i>BTILEO</i>	\$155
Bath Pillow <i>BPILLOW p.252</i>	\$240
	16" x 35" <i>BOVER16-XX</i>
Drain & Overflow <i>p.14</i>	
<input type="radio"/> Chrome 07	\$260
<input type="radio"/> White 01 <input type="radio"/> Biscuit 02	\$290
<input type="radio"/> Brushed Nickel 09	\$290
<input type="radio"/> Polished Nickel 10	\$290
<input type="radio"/> Oil-rubbed Bronze 11	\$400
If Required by Construction Code	
16" x 35" Cable driven brass drain & overflow kit <i>BOVERBR</i>	\$240

\*\* The AromaCloud® is built into the deck (factory installed).  
# The MiaPlus® Control is Included when purchasing Chromatherapy and/or a 2nd heated backrest on a TMU.  
+++ Only when ordering an AromaFlow, a ZenFlow is mandatory (Upcharge). Specify the finish of the drain.

# thalassa sensation


54" x 54" x 20"



Acrylic grab bar



## Technical Specifications

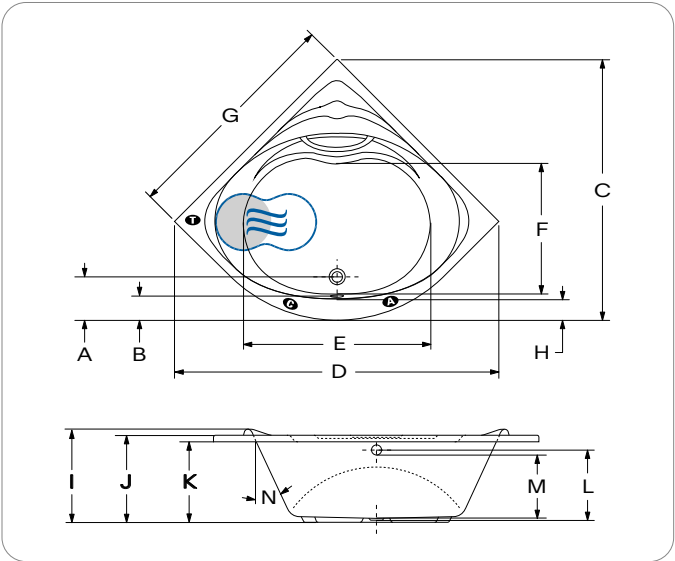

Letter	Description	Measure
A	Outside edge to center drain	10 1/2"
B	Outside edge to overflow	5 1/2"
C	Total length	58 7/8"
D	Total width	75 7/8"
E	Bathing well length	44"
F	Bathing well width	28 7/8"
G	Sidewall length	53 7/8"
H	Deck width (widest point)	5 1/4"
I	Total height to raised headrest	22 1/4"
J	Height from bottom of bath to top deck	20 1/4"
K	Height from bottom of bath to bottom of deck	18 3/4"
L	Height from bottom of drain to center of overflow	15 3/4"
M	Maximum water level (Drain & overflow 16" x 35")	14"
N	Slope of backrests	21°

**A** AromaCloud® position    **T** Turbine position (TMU)    **W** Indicates WarmTouchShell® position (Soaker)  
**C** Control position when factory-installed (Mia® or DOT)    **H** Indicates heated backrest (TMU)

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.
Turbine	Access to the pump must be at least 18" x 22". Standard connection is 20 A, 120 V, 60 Hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 Hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.
Others	The Geysair® is located on the same side as the heated backrest. It must not be relocated. It must be connected to the hot water supply and be accessible (provide access). Optional tile flange.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations ([www.bainultra.com/dealers/dealer-documentation-and-catalog](http://www.bainultra.com/dealers/dealer-documentation-and-catalog)).

Cutting template	# 90000014
Approx. shipping weight	135 lb
Turbine power	550 W
Air heater	600 W

## Warranty

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

\* Some restrictions apply | [www.bainultra.com/warranty](http://www.bainultra.com/warranty)

Dimensions are subject to change; measured at external edges. Bathing well measured at air jet level. Tolerance: ±0.25" (±0.64 cm). Ensure bathtub is received prior to any construction. BainUltra® is not responsible for any preparatory work done before product arrival.