

# vibe 6030

Freestanding  
60" x 30" x 19"



## Product No.

Model Drop-in Standard 1½" deck	TMU BVIBRD00T-XX	Soaker BVIBRD00N-XX
Model Alcove, L Standard 1½" deck	TMU BVIBRBOLT-XX	Soaker BVIBRBOLN-XX
Model Alcove, R Standard 1½" deck	TMU BVIBRBORT-XX	Soaker BVIBRBORN-XX

Model Slim deck	TMU BVIBRD10T-XX	Soaker BVIBRD10N-XX
Model Slim deck, Left	TMU BVIBRB1LT-XX	Soaker BVIBRB1LN-XX
Model Slim deck, Right	TMU BVIBRB1RT-XX	Soaker BVIBRB1RN-XX

## ThermoMasseur (TMU)

Air Jet System	\$4,895
Jets	40
1 heated backrest	Included
MiaPlus® Control	Included
BU-Touch Control Application BUTOUCH	\$495
Geysair®	Included
Illuzio Chromatherapy BCHRO6	\$995

## Soaker

Illuzio Chromatherapy BCHRO6	\$995
WarmTouchShell® BWTS	\$1,125
DOT Control	Included with therapy

## Features

Installation Type	Drop-in, Undermount & Alcove (3 walls)
No. of bathers 2 Imp. gallons 36 US gallons 44	Integrated tile flange Included
Integrated Drain & Overflow — ZenFlow <sup>†</sup> BOVERINIZF-XX	
White 01 Biscuit 02	Installed & Included
Standard Bath Color p.17	
White 01 Biscuit 02	Included

## Options UPCHARGE APPLICABLE

Finish p.17		
UltraVelour Matte Finish (white only) BVEL2		\$650
Universal Armrests BGBGU-XX p.16		
White 01		\$895
Skirt Multifit (standard 1½" deck only) BSMUL-XX p.254		
White 01 Biscuit 02		\$600
Bath Pillow BPILLOW p.252		\$240
Drain & Overflow p.14	Integrated ZenFlow <sup>†</sup> BOVERINIZF-XX	Integrated with trim BOVERIN-XX
White 01 Biscuit 02	Incl.	\$40
Matte White 32 Chrome 07		\$40 \$70
Brushed Nickel 09 Polished Nickel 10		
Matte Black 19 Satin Brass 18		\$95 \$125
If Required by Construction Code		
Brass drain & overflow kit BDRCOB		\$240
Brass drain kit BDRCB		\$60

⚠ Don't forget that an integrated tile flange is available at no extra cost. You must specify drain position (right or left). With the control on the deck, a complete shower door cannot be installed.

Don't forget to specify the finish of the Integrated drain & overflow. Don't forget to specify the deck height (½" or 1½").


<sup>†</sup> ZenFlow: Integrated overflow without a trim. Undermount installation is available with the 1½" deck.

vibe 6030

Freestanding  
60" x 30" x 19"



Technical Specifications

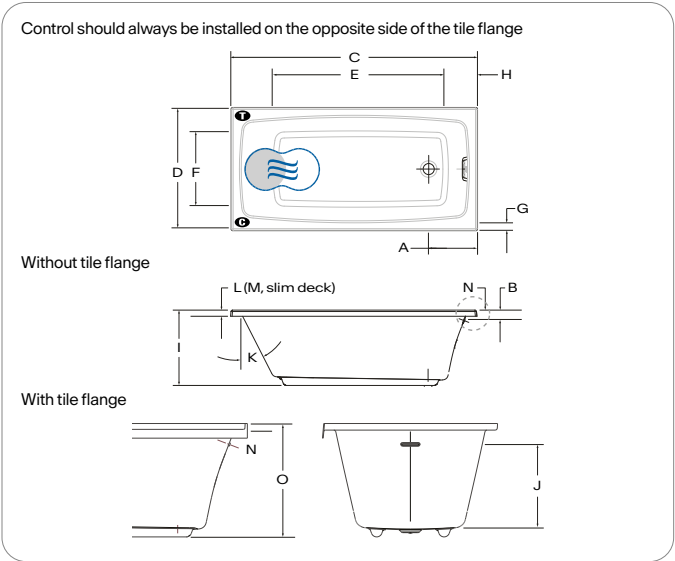

Letter	Description	Measure
A	Outside edge to center drain	10 1/8"
B	Outside edge to center of overflow	2 1/2"
C	Total length	60"
D	Total width	30"
E	Bathing well length	44"
F	Bathing well width	19 1/8"
G	Deck width	1 7/8"
H	Deck width at drain end	2"
I	Height from bottom of bath to top deck	18 1/2"
J	Maximum water level	14 5/16"
K	Slope of backrest	27°
L	Height from bottom of deck to top std deck	1 1/2"
M	Height from bottom of deck to top slim deck	1/2"
N	Tile flange height	1"
O	Height of bath from bottom of bath to top of tile flange	19 1/2"

● Control position when factory-installed (Mia® or DOT)    ● Turbine position (TMU)  
● Indicates heated backrest (TMU)    ● Indicates WarmTouchShell® position (Soaker)

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.
Turbine	Access to the pump must be at least 18" x 22". Standard connection is 20 A, 120 V, 60 Hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 Hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.
Others	The Geysair® is located on the same side as the heated backrest. It must not be relocated. It must be connected to the hot water supply and be accessible (provide access).
	Turbine must be remotely installed in certain conditions. Integrated tile flange is included (specify right or left).

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations ([www.bainultra.com/dealers/dealer-documentation-and-catalog](http://www.bainultra.com/dealers/dealer-documentation-and-catalog)).

Cutting template	# 90000078
Approx. shipping weight	200 lb
Turbine power	550 W
Air heater	600 W

Warranty

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

\* Some restrictions apply | [www.bainultra.com/warranty](http://www.bainultra.com/warranty)

Dimensions are subject to change; measured at external edges. Bathing well measured at air jet level. Tolerance: ±0.25" (±0.64 cm). Ensure bathtub is received prior to any construction. BainUltra® is not responsible for any preparatory work done before product arrival.