
MONARCH 6032

60" x 32" x 20"

Monarch is a refined collection of therapeutic baths with distinctive Quartz deck surfaces, for a look that's noble and pure.

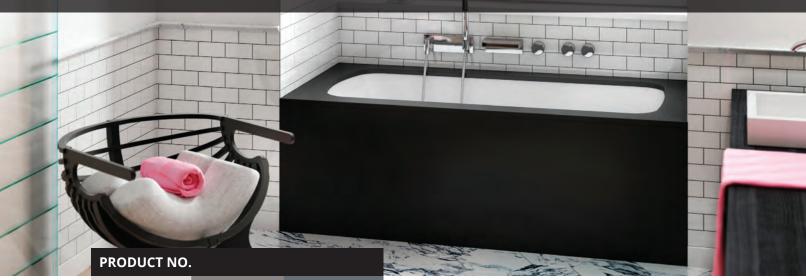

DESCRIPTION	тми	TUB
Standard (S)*	BMODRB00T-XX	BMODRB00N-XX
Grand Luxury (GL)*	BMLDRB00T-XX	BMLDRB00N-XX

THERMOMASSEUR (TMU) Hydro-thermo massage • Air jet system	GL \$
Jets	37
1 heated backrest	Included
MiaPlus® Control (not installed)	Included
BU-Touch Control Application BUTOUCH NEW	\$
Geysair®	Included
AromaCloud®	N/A
Illuzio Chromatherapy BCHRO6	\$

TUB Soaker	s \$	GL \$
AromaCloud®		N/A
Illuzio Chromatherapy BCHRO6		\$
WarmTouchShell® BWTS		\$
DOT control		Included with therapy

FEATURES				
Installation type		Drop-in & Alcove (3 walls)		
No. of bathers	•	Imp. gallo	ns	42
US gallons	50			
INTEGRATED WASTE	& OVERFLO	W BOVERINI-	xx	
White 01, Chrome 07, Br	ushed Nicke	l 09, Polished	Nickel 10	Inst. & Incl.
STANDARD COLOR (inner shell)				
White 01				Included
QUARTZ DECK COLOR		E	S* BDMO6032-XX	GL* BDML6032-XX
Grey Noka 22 Expo 21	Jet Black 23	Lagos Blue 24	Included	Included


OPTIONS (UPCHARGE APPLICABLE)		
QUARTZ DECK COLOR	S* BDMO6032-XX	GL* BDML6032-X
Quasar Light 25	\$	\$
Piatra Bianco Woodlands Grey 26 Drift 31 30	\$	\$
Statuario Maximus 29	\$	\$
FINISH (inner shell)		
UltraVelour Matte Finish (White only) BVEL		\$
INTEGRATED WASTE & OVERFLOW BOVERINI	-XX	
Matte Black 19, Black Chrome 12, Satin Brass 18		\$
WASTE & OVERFLOW 16" x 35" BOVER16-XX		
Chrome 07		\$
White 01		\$
Brushed Nickel 09, Polished Nickel 10, Oil-rubbed	l Bronze 11	\$
QUARTZ SKIRT 6018 (60" x 18 7/8") BSM6018-X	(
Grey Expo 21, Noka 22		\$
Jet Black 23, Lagos Blue 24		\$
Quasar Light 25		\$
Piatra Grey 26, Bianco Drift 31, Woodlands 30		\$
Statuario Maximus 29		\$
TILE FLANGE (specify right or left)		
Ordered with bath (not installed) BTILEN		\$
Factory-installed. Right BTILER, Left BTILEL, Special installation BTILEO		\$
IF REQUIRED BY CONSTRUCTION CODE		
Brass waste & overflow kit** BDRCOB		\$
Brass waste kit** BDRCB		\$
16" x 35" Cable driven brass waste & overflow kit	BOVERBR-XX	\$






MONARCH 6032

INSTALLATION





	F
<u>- *</u>	G
<u> </u>	— н
∟ _F	I
•	J
	К
	Turbine p
	Indicates
	Don't for of quart waste & * Standa
	shole VA/In

LETTER	DESCRIPTION	MEASURE
Α	Total length	60"
В	Total width	32"
С	Bathing well length (at height of jets)	43 5/8"
D	Bathing well width (at height of jets)	19 5/8"
E	Deck width (edges)	4"
F	Deck width (sides)	4 5/8"
G	Bath height	19 7/8"
Н	Height from drain to center of overflow	15 3/8"
I	Outside edge to center drain	11 1/8"
J	Slope of backrest	24°
K	Quartz deck height	3/4"

position (TMU)

heated backrest (TMU)

 Indicates WarmTouchShell® position (TUB)

rget that this model is available in **White only with choice**tz **deck color**. Don't forget to specify the **finish of the integrated** overflow.

- ard: Quartz deck with seam. Grand Luxury: one piece Quartz deck.
- ** When ordered with integrated waste & overflow.

TOTAL PRICE

TECHNICAL SE	PECIFICATIONS		
Hot water supply required	Should be 70% of water capacity of TUB or greater.	Approx. shipping weight	234 lbs
supply required	Access to the pump must be at least 18" x 22". Standard connection is 20 A. 120 V, 60 hz , dedicated	Turbine power	550 W
Turbine	Turbine line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is	Air heater	600 W
	needed 15 A. 120 V, 60 hz, dedicated line with a GFCI.	WARRANTY	
Others	 The GEYSAIR must always be accessible and connected to the hot water supply (provide access). Control cannot be installed on the Quartz deck. 	Controls-LED-Geysair*	5 years
- Optional tile flange (specify right or left).		Quartz deck*	15 years
Our products must be installed by certified professionals only and according to our Monarch Installation Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/documentation/documentation).	Bath & turbine*	20 years	
		* Some restrictions apply www.bainultr	a.com/warranty





The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.