

Freestanding	BVDEOF00T-XX	BVDEOF00N-XX
THERMOMASSEUR (T Hydro-thermo massag		\$8,655
Jets		35
1 heated backrest		Included

MiaPlus® Control\* Included **BU-Touch Control Application BUTOUCH** \$430 Included Geysair® Illuzio Chromatherapy BCHRO6 \$925

<b>TUB</b> Soaker	\$6,430
Illuzio Chromatherapy BCHRO6	\$925
WarmTouchShell® BWTS	\$1,125
DOT control	Included with therapy

FEATURES				
Installation type		Freestanding		
No. of bathers	•	Imp. gallons		33
US gallons	40			
INTEGRATED WASTE & OVERFLOW BOVERINI-XX p. 10				
White 01, Chrome 07, Brushed Nickel 09, Polished Nickel 10, Matte White with UltraVelour finish 32		Installed & Included		
STANDARD COLOR p.13				
				Included

OPTIONS (UPCHARGE APPLICABLE)	
COLOR p.13	
Black / White 66	\$475
FINISH p.6	
UltraVelour Matte Finish (white only) BVEL2	\$850
UNIVERSAL ARMRESTS BGBGU-XX p.12	
White 01	\$750
INTEGRATED WASTE & OVERFLOW BOVERINI-XX p.10	
Matte Black 19, Satin Brass 18	\$120
ISLAND TUB DRAIN™** p.11	
Island Tub Drain™ BISLDD	\$260
Cast Iron Island Tub Drain™ BISLDDCI	\$310
IF REQUIRED BY CONSTRUCTION CODE	
Brass waste & overflow kit BDRCOB	\$240
Brass waste kit BDRCB	\$60



- Don't forget to specify the **finish of the integrated waste & overflow.**
- \* Control must be wall-mounted. Faucets must be freestanding or wall-mounted.
- \*\* An Island Tub Drain™ is required when there is **no access under** the bath.




White 01





## INSTALLATION

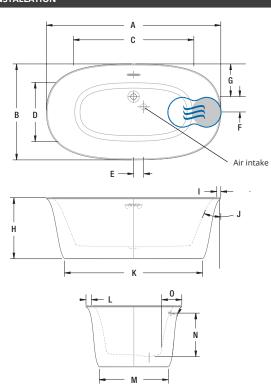

LETTER	DESCRIPTION	MEASURE
Α	Total length	60"
В	Total width	33"
С	Bathing well length	41 1/2"
D	Bathing well width	20 3/8"
E	Center of air intake to center of drain (front)	3 1/2"
F	Center of air intake to center of drain (side)	3 1/2"
G	Outer edge to center of drain	11 1/4"
Н	Total height	21"
ı	Deck width at headrest	2 1/2"
J	Slope of backrests	22°
К	Base length	47 1/2"
L	Deck width	2"
М	Base width	23 3/4"
N	Maximum water level Maximum water level with AromaFlow	14 5/16" 13"
0	Minimum spout reach	6 1/2"

Indicates heated backrest (TMU)

Indicates WarmTouchShell® position (TUB)

TECHNICAL SP	ECIFICATIONS		
Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.	Cutting template	# 90000081
supply required	Access to the pump must be at least 18" x 22". <b>Standard connection is 20 A. 120 V, 60 Hz</b> , dedicated	Approx. shipping weight	230 lb
Turbine	line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is	Turbine power	550 W
	needed 15 A. 120 V, 60 Hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.	Air heater	600 W
Others It mu - Fauc - The t - Cont	<ul> <li>The Geysair® is located on the same side as the heated backrest. It must NOT be relocated. It must be connected to the hot water supply and be accessible (provide access).</li> <li>Faucet must be freestanding or wall-mounted.</li> <li>The turbine must be remotely installed.</li> <li>Controls cannot be installed on the deck of the bath.</li> <li>The water level will be lower when an AromaFlow is installed.</li> </ul>	WARRANTY	
		Controls-LED-Geysair*	5 years
		Bath & turbine*	20 years
	be installed by certified professionals only and according to our Owner's Manual as well as federal, docal building codes and regulations (www.bainultra.com/dealers/dealer-documentation-and-catalog).	* Some restrictions apply   www.bainulti	a.com/warranty

The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.